




DuPont Personal Protection

2016 Product Catalog



DUPONT GARMENTS: LEVELS OF PROTECTION TO MEET YOUR NEEDS

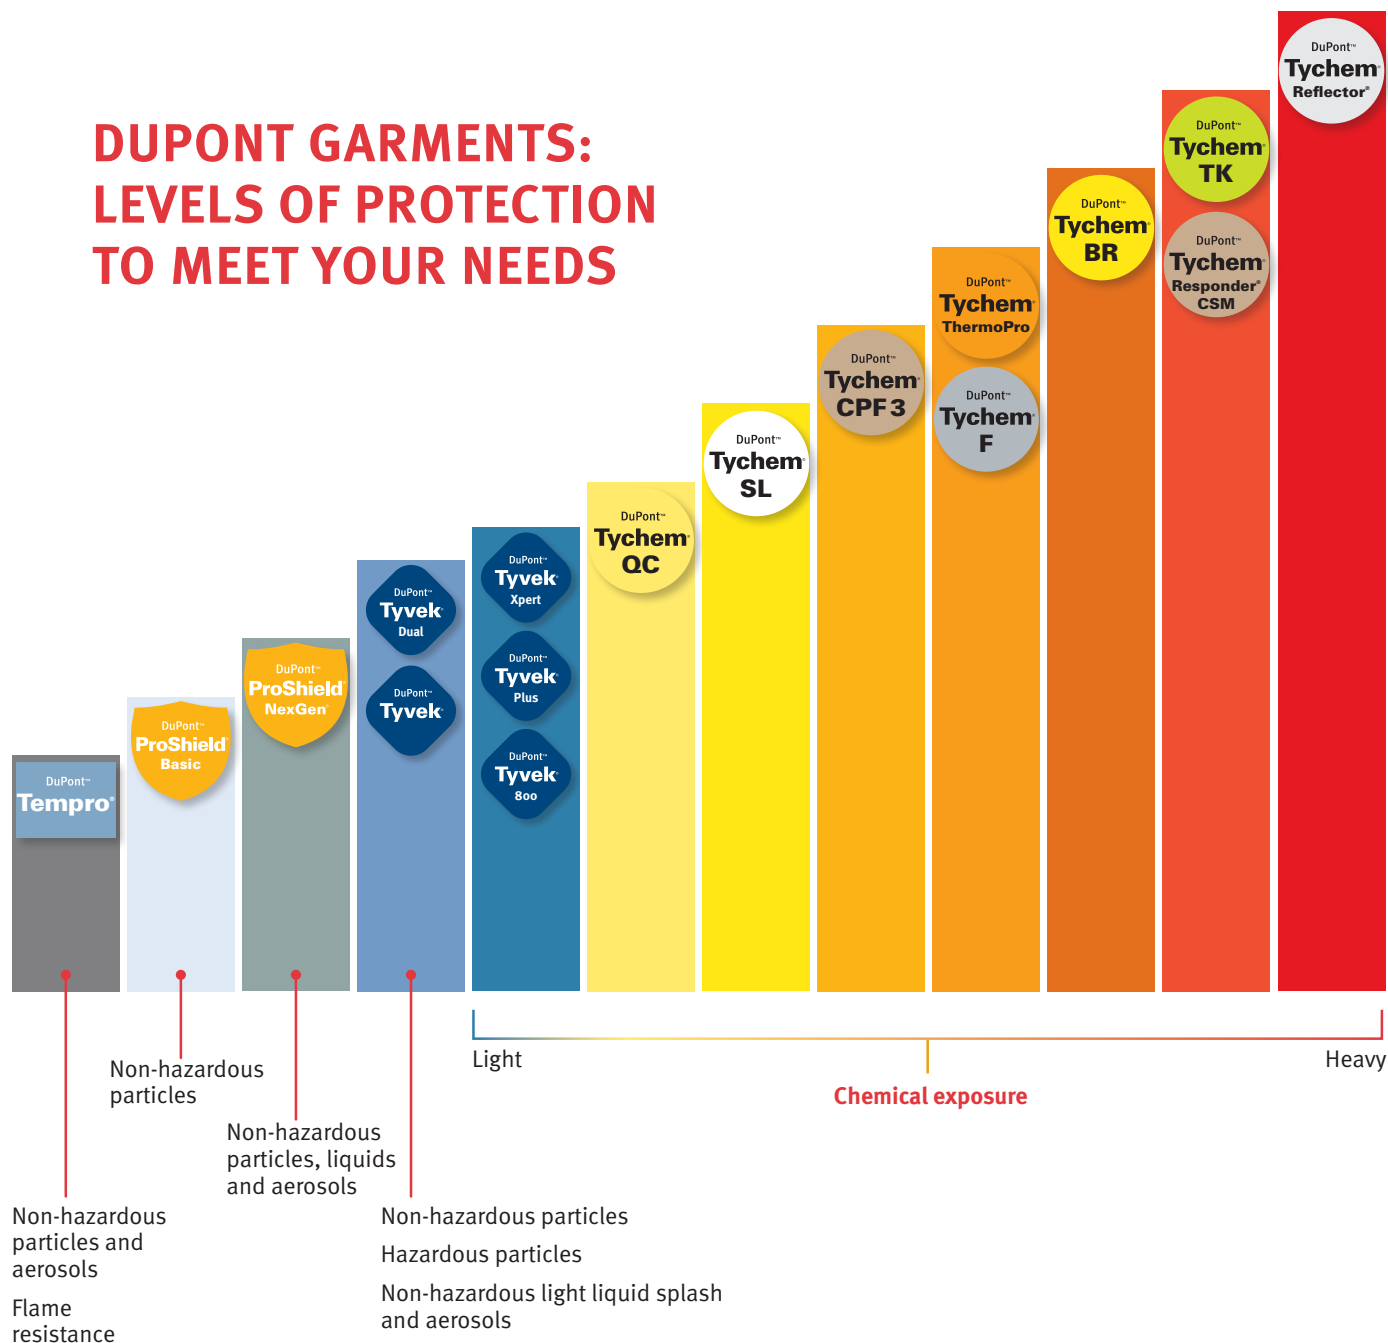

DuPont™ SafeSPEC™

Different jobs require different levels of protective clothing. DuPont Personal Protection offers a wide range of protective clothing to address those varying needs.

Visit SafeSPEC.DuPont.com to search by industry or hazard to help you select a garment.

CONTENTS

4 CHOOSING A GARMENT

6 PRODUCT PART NUMBERS

8 PERMEATION DATA

10 PRODUCT LINE BY HAZARD

GARMENTS

- 12 Tempro®
- 13 ProShield® Basic
- 14 ProShield® 3
- 15 ProShield® NexGen®
- 16 Tyvek® Dual
- 17 Tyvek®
- 19 Tyvek® boot and shoe covers
- 20 Tyvek® Xpert / Tyvek® Plus
- 21 Tyvek® 800 J
- 22 Tychem® QC
- 24 Tychem® SL
- 26 Tychem® CPF 3
- 28 Tychem® F
- 30 Tychem® ThermoPro
- 32 Tychem® BR
- 34 Tychem® TK
- 36 Tychem® Responder® CSM
- 37 Tychem® Reflector® / Tychem® TK ensembles
- 38 Accessories for Tychem® garments

39 SIZING

40 DUPONT CONTROLLED ENVIRONMENTS

CHOOSING A GARMENT

Before searching for an appropriate chemical protective garment, a detailed assessment of the nature of the hazard and the working environment is needed. There are different factors like concentration, temperature, pressure and the work environment that should be matched to the garment's fabric, design and seam construction.

FABRIC




No matter what the brand or trade name, almost all limited use protective apparel products can be classified into one of a few general fabric technologies. It is important to understand the performance attributes of the fabric being used for a given application. Why? Not all fabrics used in chemical protective garments are the same. From exclusive DuPont technologies, such as DuPont™ Tychem® and DuPont™ Tyvek® to SMS and microporous film fabrics, DuPont offers a variety of fabrics with different levels of comfort, durability, breathability and protection to meet your specific needs.

In order to select the appropriate protective garment, it is crucial to know how well the fabric used in the garment provides a barrier to specific hazardous materials. Testing

for chemical protective fabrics can be divided into two primary categories: 1) penetration testing—appropriate for particle hazards and 2) permeation testing—appropriate for liquid and gaseous hazards. Penetration occurs when there is bulk movement of a material through a pore, hole, gap or defect in the fabric and is the proper method to evaluate particle barrier. Permeation, on the other hand, occurs when there is movement of the material through the barrier fabric on a molecular level. It is possible for a liquid or vapor to permeate through a fabric even when there is no observed opening in the fabric. Permeation testing is a more sensitive and representative way of characterizing the interaction of liquids and gases with the barrier fabric. Permeation testing is critical for fabrics that are exposed to hazardous liquids, vapors or gases.

FABRIC TECHNOLOGIES TYPICALLY USED IN PROTECTIVE GARMENTS

All images are magnified

Increased Fabric Performance ↑		DuPont™ Tychem® Chemical barrier fabrics specifically engineered for protection over a range of hazards.
		DuPont™ Tyvek® Made only by DuPont, it offers superior protection and durability. Tyvek® is 100% high-density polyethylene fibers entangled into a protective material—with no fillers or thin films to wear away.
		Microporous Films (SF or MF) Bi-laminate with a thin microporous film layer on a spunbonded polypropylene nonwoven, these fabrics offer limited durability—barrier protection is lost when the film layer is abraded.
		Spunbond-Meltblown-Spunbond (SMS) SMS fabrics rely on the meltblown polypropylene layer in the middle of the open tri-laminate polypropylene structure to act as the main filter for particles—limited durability and barrier performance, especially liquids. Spunbonded Polypropylene (SBPP) With their highly open structure, SBPP fabrics offer negligible barrier protection.

**EXCLUSIVE
DUPONT
TECHNOLOGIES**

CHOOSING A GARMENT


SEAM CONSTRUCTION

Seams are a critical component of the overall barrier protection provided by a chemical protective garment. It is vital to select the appropriate seam configuration




Serged or Sewn*

A seam produced when multiple threads are interlocked around the raw edges of two pieces of material for a strong, stress-resistant seam.




Bound*

Tightly sewn with a reinforced outer binding to increase seam strength and barrier. For potential misting exposure of non-hazardous liquids or particle penetration through the seam.



Taped

Both sewn and taped to provide strong chemical resistance against heavy liquid splashes and tough seam stress. A sewn seam is covered with a strip of compatible material by heat-sealing.



Double Taped

Sewn, then taped on the inside and the outside of the seam for a very strong chemical- and stress-resistant seam.

*Serged and/or bound seams are degraded by some hazardous liquid chemicals, such as strong acids, and should not be worn when these chemicals are present.

GARMENT STYLE

DuPont offers a wide variety of garment styles—from hoods and shoe covers to aprons, coveralls and fully encapsulated suits. Fully encapsulated suits are available with front or rear entry, with a flat back for airline accommodation or an expanded back for SCBA accommodation.



Hoods

In addition to our standard hood design, many of our garments offer a respirator fit hood. These hoods are designed with a longer zipper for complete coverage of the neck area.



Standard



Respirator fit

Faceshields

In addition to the standard faceshield, DuPont has several garment styles that offer a greater field of vision, enabling the wearer to see more of what they are dealing with, reducing missteps and allowing more natural movement and better eye contact.



Standard

The EX (extra-wide) faceshield options on Tychem® TK and Tychem® BR Level A garments feature a wrap-around design that provides ample room for a mask-mounted regulator. This faceshield is wider and longer, providing expanded peripheral and vertical viewing.



EX (extra-wide)

GARMENT COLOR

High visibility can be either a help or a hindrance for emergency responders. For example, in hazardous situations, it is critical that emergency responders can be easily seen. In addition, hazardous material emergencies often do not occur in well-lighted environments—thus the need for high visibility is obviously an important feature. The high-visibility colors chosen for DuPont™ Tychem®



fabrics were based on extensive visibility research. For example, the human eye is more sensitive to the lime yellow of Tychem® TK and the safety yellow colors of Tychem® BR and Tychem® QC fabrics. On the other hand, there are instances when being visible is as dangerous as the chemical or biological agent that will be encountered. When discretion is preferred—or required—special low-visibility fabrics, such as Tychem® CPF 3, are less easy to see and blend into a variety of environments.

PRODUCT PART NUMBERS

PRODUCT PART NUMBER ABBREVIATIONS

To simplify ordering and inventory management at your facility, we developed a simple, logical and intuitive product part numbering system. Using only 16 characters, each part number is comprised of abbreviations that provide all the information you need. For your convenience, here is a guide to these abbreviations.

PART NUMBER GUIDE

TY	120	S	WH	LG	0025	00
Fabric	Style	Seam	Color	Size	Case count	Options

The first two characters are the fabric description.

Abbreviations

DuPont™ Tychem®

QC Tychem® QC
SL Tychem® SL
TF Tychem® F
TP Tychem® ThermoPro
C3 Tychem® CPF 3
BR Tychem® BR
RC Tychem® Responder® CSM
TK Tychem® TK
RF Tychem® Reflector®
99 Accessories

DuPont™ Tyvek®

TD Tyvek® Dual
TY Tyvek®
TJ Tyvek® 800 J
FC Tyvek® FC

DuPont™ ProShield®

PB ProShield® Basic
NG ProShield® NexGen®
P3 ProShield® 3

Other

TM Tempro®

DuPont offers a wide array of garment styles—from hoods to aprons and coveralls to fully encapsulated suits. Each garment style has a unique three-digit code.

Seam construction

Abbreviations

S Serged or sewn
B Bound
T Taped or double taped
See page 5 for details.

Many DuPont garments are available in a range of sizes; refer to catalog descriptions for details.

Abbreviations*

SM Small
MD Medium
LG Large
XL Extra large
2X 2 Extra large
3X 3 Extra large
4X 4 Extra large
5X 5 Extra large
6X 6 Extra large
7X 7 Extra large
00 Universal

See page 39 for sizing charts.

For example,

TV designates Trade Agreement Act compliant.

VP designates vend packed.

Not all option codes are available for all products; refer to catalog descriptions for details.

See page 7 for abbreviations.

Provides the number of garments per case.

Several DuPont fabrics are available in color options.

Abbreviations

BU Blue
GY Gray
LY Lime yellow
OR Orange
SV Silver
TN Tan
WH White
YL Yellow

*Not all sizes available in all styles.

Stock Items versus Make to Order

For the General Protection line of garments (Tyvek®, ProShield® Basic, ProShield® 3, ProShield® NexGen® and Tempro®), sizes Medium to 4X are identified as stock items. Sizes Small and 5X and above are identified as Make to Order. Certain accessory items are also identified as Make to Order.

Most garments in the Chemical/HazMat line (Tychem® QC, Tychem® SL, Tychem® F, Tychem® BR, Tychem® Responder® CSM and Tychem® TK) are identified as Make to Order. A small grouping is identified as stock items, following the same size guidelines as indicated above.

Stock/Make to Order designations are based on sales volume and production efficiencies. Therefore, designations are subject to change without notice.

PRODUCT PART NUMBERS

OPTION CODE ABBREVIATIONS

00	Standard offering
0B	Bulk pack
2K	Double storm flap w/zipper & hook-and-loop closure
5C	Showa Best® 892 outer glove
5V	Showa Best® 890
7C	MSA connector pass-thru CAMDS (#491335) right side
7M	MSA dual purpose w/Foster fitting 990060
7N	MSA quick fill w/Schrader fitting 990190
7R	MSA dual purpose #495670 Hansen fitting (left front waist)
7S	Scott® pass-thru #803620-01 Hansen fitting (right side)
7W	Interspiro pass-thru #33689006
BN	Berry Amendment compliant
G1	Reduced case quantity
JF	CPE sleeve cuff and jam fit glove insert
LG	8.25" high shoe cover
NF	NAFTA sourced
NP	Respirator fit hood and storm flap
NS	Non-skid material
PI	Packaged individually
RP	Retail packaged
SR	Skid resistant
TV	Trade Agreement Act compliant
VP	Vend packed
WG	With gloves



Retail packaged



Vend packed

PERMEATION DATA

MID LEVEL

DuPont™
Tychem



21 Industrial Chemicals ASTM F1001	CAS #	Physical Phase	Tychem® QC*	Tychem® SL*	Tychem® F	Tychem® ThermoPro	Tychem® CPF 3
Acetone	67-64-1	L	imm.	imm.	>480	>480	>480
Acetonitrile	75-05-8	L	imm.	60	>480	>480	imm.
Ammonia	7664-41-7	G	imm.	26	20	90	imm.
1, 3-Butadiene	106-99-0	G	imm.	>480	>480	>480	>480
Carbon disulfide	75-15-0	L	imm.	imm.	>480	>480	16
Chlorine	7782-50-5	G	imm.	>480	>480	>480	imm.
Dichloromethane	75-09-2	L	imm.	imm.	imm.	imm.	imm.
Diethylamine	109-89-7	L	imm.	15	>480	>480	>480
N, N-Dimethylformamide	68-12-2	L	imm.	90	>480	>480	>480
Ethyl acetate	141-78-6	L	imm.	imm.	>480	>480	>480
Ethylene oxide	75-21-8	G	imm.	imm.	126	126	>480
n-Hexane	110-54-3	L	imm.	imm.	>480	>480	>480
Hydrogen chloride	7647-01-0	G	imm.	>480	>480	>480	>480
Methanol	67-56-1	L	imm.	>480	117	>480	imm.
Methyl chloride	74-87-3	G	imm.	>480	>480	>480	>480
Nitrobenzene	98-95-3	L	imm.	57	>480	>480	>480
Sodium hydroxide, 50%	1310-73-2	L	>480	>480	>480	>480	>480
Sulfuric acid	7664-93-9	L	>480	>480	>480	50	>480
1, 1, 2, 2-Tetrachloroethylene	127-18-4	L	imm.	imm.	>480	>480	>480
Tetrahydrofuran	109-99-9	L	imm.	imm.	>480	>480	>480
Toluene	108-88-3	L	imm.	imm.	>480	>480	>480
Chemical Warfare Agents**							
Lewisite (L)	541-25-3	L	nt	>360 ¹	360 ²	360 ²	120 ¹
Mustard (HD)	505-60-2	L	nt	180 ¹	>480 ²	>480 ²	120 ¹
Tabun (GA)	77-81-6	L	nt	nt	>480 ⁴	>480 ⁴	nt
Sarin (GB)	107-44-8	L	nt	>60 ³	>480 ⁴	>480 ⁴	120 ³
Soman (GD)	99-64-0	L	nt	nt	>480 ⁴	>480 ⁴	>480 ³
VX Nerve Agent	50782-69-9	L	nt	>480 ³	>480 ⁴	>480 ⁴	>480 ³

Index of codes: >=greater than, **imm.**=immediate (<10 minutes), **nt**=not tested, **L**=liquid, **G**=gas

Normalized Breakthrough Time (NBT) shown in minutes.

*Serged and/or bound seams are degraded by some hazardous liquid chemicals, such as strong acids, and should not be worn when these chemicals are present.

Actual Breakthrough Time in minutes.

Permeation testing on industrial chemicals is in accordance with ASTM F739, *Standard Test Method for Resistance of Protective Clothing Materials to Permeation by Liquids or Gases Under Conditions of Continuous Contact*. All tests are conducted at room temperature unless otherwise noted. Reported results are Normalized Breakthrough Times defined by ASTM F739 as the time (in minutes) when the permeation rate reaches 0.1 µg/cm²/min.

The product information contained is current as of the date of publication, but may be revised as new information is developed. Before relying on any performance data for the purchase or performance of products, you should check SafeSPEC.DuPont.com or contact DPP Customer Service at 1-800-931-3456 to determine whether there is new information that relates to your intended use or application of the product.

NOTE: Numbers reported are averages of samples tested. Sample results vary.

All DuPont testing is performed by a third party.

**Chemical warfare agents are tested according to the following protocols:

¹Protocol DN3-MIL-STD-282, Method T-209 (HD) or modified for Lewisite, for 12 hours at 10 g/m².

²Protocol DN4-MIL-STD-282, Method T-209 (HD) or modified for Lewisite, for 12 hours at 100 g/m² (total coverage).

³Protocol DN5-MIL-STD-282, Method T-208 (GB) or modified for GA, GD and VX, for 12 hours at 10 g/m².

⁴Protocol DN6-MIL-STD-282, Method T-208 (GB) or modified for GA, GD and VX, for 12 hours at 100 g/m² (total coverage).

All tests are performed at 22°C and 50% R.H. Actual Breakthrough Times, in minutes, are reported.

PERMEATION DATA

HIGH LEVEL



21 Industrial Chemicals ASTM F1001	CAS #	Physical Phase	Tychem® BR	Tychem® TK	Tychem® Responder® CSM	Tychem® Reflector®
Acetone	67-64-1	L	>480	>480	>480	>480
Acetonitrile	75-05-8	L	>480	>480	>480	>480
Ammonia	7664-41-7	G	133	>480	133	>480
1, 3-Butadiene	106-99-0	G	>480	>480	>480	>480
Carbon disulfide	75-15-0	L	>480	>480	>480	>480
Chlorine	7782-50-5	G	>480	>480	>480	>480
Dichloromethane	75-09-2	L	>480	>480	>480	>480
Diethylamine	109-89-7	L	>480	>480	>480	>480
N, N-Dimethylformamide	68-12-2	L	>480	>480	>480	>480
Ethyl acetate	141-78-6	L	>480	>480	>480	>480
Ethylene oxide	75-21-8	G	>480	>480	>480	>480
n-Hexane	110-54-3	L	>480	>480	>480	>480
Hydrogen chloride	7647-01-0	G	>480	>480	>480	>480
Methanol	67-56-1	L	185	>480	>480	>480
Methyl chloride	74-87-3	G	>480	>480	>480	>480
Nitrobenzene	98-95-3	L	>480	>480	>480	>480
Sodium hydroxide, 50%	1310-73-2	L	>480	>480	>480	>480
Sulfuric acid	7664-93-9	L	>480	>480	>480	>480
1, 1, 2, 2-Tetrachloroethylene	127-18-4	L	>480	>480	>480	>480
Tetrahydrofuran	109-99-9	L	>480	>480	>480	>480
Toluene	108-88-3	L	>480	>480	>480	>480
Chemical Warfare Agents**						
Lewisite (L)	541-25-3	L	>480 ¹	>480 ²	>480 ¹	>480 ¹
Mustard (HD)	505-60-2	L	>480 ²	>480 ²	>480 ²	>480 ²
Tabun (GA)	77-81-6	L	>480 ³	>480 ⁴	>480 ³	>480 ³
Sarin (GB)	107-44-8	L	>480 ⁴	>480 ⁴	>480 ⁴	>480 ⁴
Soman (GD)	99-64-0	L	>480 ³	>480 ⁴	>480 ³	>480 ³
VX Nerve Agent	50782-69-9	L	>480 ⁴	>480 ⁴	>480 ⁴	>480 ⁴

Index of codes: >=greater than, imm.=immediate (<10 minutes), nt=not tested, L=liquid, G=gas

Normalized Breakthrough Time (NBT) shown in minutes.

*Serged and/or bound seams are degraded by some hazardous liquid chemicals, such as strong acids, and should not be worn when these chemicals are present.

Actual Breakthrough Time in minutes.

Permeation testing on industrial chemicals is in accordance with ASTM F739, *Standard Test Method for Resistance of Protective Clothing Materials to Permeation by Liquids or Gases Under Conditions of Continuous Contact*. All tests are conducted at room temperature unless otherwise noted. Reported results are Normalized Breakthrough Times defined by ASTM F739 as the time (in minutes) when the permeation rate reaches 0.1 µg/cm²/min.

The product information contained is current as of the date of publication, but may be revised as new information is developed. Before relying on any performance data for the purchase or performance of products, you should check SafeSPEC.DuPont.com or contact DPP Customer Service at 1-800-931-3456 to determine whether there is new information that relates to your intended use or application of the product.

NOTE: Numbers reported are averages of samples tested. Sample results vary.

All DuPont testing is performed by a third party.

**Chemical warfare agents are tested according to the following protocols:

¹Protocol DN3-MIL-STD-282, Method T-209 (HD) or modified for Lewisite, at 10 g/m².

²Protocol DN4-MIL-STD-282, Method T-209 (HD) or modified for Lewisite, at 100 g/m² (total coverage).

³Protocol DN5-MIL-STD-282, Method T-208 (GB) or modified for GA, GD and VX, at 10 g/m².

⁴Protocol DN6-MIL-STD-282, Method T-208 (GB) or modified for GA, GD and VX, at 100 g/m² (total coverage).

All tests are performed at 22°C and 50% R.H. Actual Breakthrough Times, in minutes, are reported.

PRODUCT LINE BY HAZARD

When it comes to addressing a broad range of hazards in the workplace, specifiers have many product options from which to select. The process to understand which option matches a given situation can be confusing and taxing. DuPont Personal Protection has tried to reduce some of that burden by providing a complete line of products with supporting information to help guide specifiers through the selection process.

To get the most out of your Personal Protective Equipment (PPE), it is necessary to understand where the products are intended to be used. DuPont™ SafeSPEC™ is a

sophisticated, easy-to-use interactive tool that provides suggestions for chemical protective clothing based on the user's hazard scenario.

Our database includes hundreds of chemicals, including warfare agents and the ASTM F1001 standard list of challenge chemicals. This tool can be accessed on our website at SafeSPEC.DuPont.com. To provide a quicker overview of our products and where they are ideally suited for use, we developed the simple guide below. Our goal was to match the level of protection and value for a given exposure hazard.

DUPONT™ TYVEK® AND GENERAL PROTECTION PRODUCTS

Garment	Typical general industrial hazards/Description/Examples																							
	Non-hazardous								Hazardous															
	Particles			Aero-sol	Light liquid splash*				Particles										Aero-sol	Light liquid splash*				Flame** resistance
	General dirt & grime	Animal waste	Sanding & grinding waste	Spray paint	Oil & grease	Lubri-cants	Fertilizer	Sewage	Fertilizer	Pesti-cides	Asbestos	Lead	Chro-mium	Beryllium	Mold	Fiber-glass	Carbon	Radio-active particles	Isocyanate containing	Sulfuric acid (18%)	Sulfuric acid (30%)	Sodium hydroxide (40%)	Sodium hydroxide (50%)	
Tyvek®	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●					
Tyvek® Xpert	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●		●		
Tyvek® Plus	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●		
Tyvek® 800 J	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	
ProShield® NexGen®	○	○	○	●	●	●	●	●																
ProShield® Basic	○	○	○	○	○	○	○	○																
Tempro®	○	○	○	○	○	○																	●	

● Generally preferred

○ Acceptable for use

*Liquid barrier performance varies based on the amount of liquid that may get on the garment, the length of time the liquid is on the garment, applied pressure and certain physical properties of the liquid. Tyvek®, Tyvek® Dual, ProShield® Basic, ProShield® NexGen®, Tyvek® FC and ProShield® 3 garments are not appropriate if during use they are getting wet (liquid is dripping or running, or it is wet to the touch) or if spotting is observed on skin or garments worn under the protective garment. Serged and bound seams are degraded by some hazardous liquid chemicals, such as strong acids, and should not be worn when these chemicals are present. Tyvek® Plus and Tyvek® Xpert garments use a special type of Tyvek® fabric, which has different physical properties and improved chemical resistance properties when compared to fabric used in standard Tyvek® garments. Additionally, the seams used in standard Tyvek® garments are different than the seams for Tyvek® Plus and Tyvek® Xpert garments. Tyvek® Plus garments offer seams that are sewn and then taped, and Tyvek® Xpert garments offer external sewn seams, where the seam thread is visible on the outside of the garment. Tyvek® Xpert and Tyvek® Plus offer improved liquid barrier, but may not be appropriate if spotting is observed on the skin or garments worn under the protective garment. In applications where a higher liquid barrier is needed, consider Tychem® QC and Tychem® SL garments with taped seams.

**Tempo® garments are flame retardant treated, not inherently flame resistant, and are intended to be worn OVER primary flame-resistant protective apparel such as Nomex® IIIA.

It is the user's responsibility to determine the nature and level of hazard and the proper personal protective equipment needed. The information set forth herein reflects laboratory performance of fabrics, not complete garments, under controlled conditions. It is intended for information use by persons having technical skill for evaluation under their specific end-use conditions, at their own discretion and risk. Anyone intending to use this information should first verify that the garment selected is suitable for the intended use. In many cases, seams and closures have shorter breakthrough times and higher penetration rates than the fabric. Please contact DuPont for specific data. If the garment becomes torn, abraded or punctured, end user should discontinue use of garment to avoid potential exposure.

Tyvek® Xpert and Tyvek® Plus contain natural rubber latex, which may cause allergic reactions in some sensitized individuals. Anyone who begins to exhibit an allergic response during the use of DuPont products should immediately cease using these products. The incident should also be reported to DuPont at 1-800-441-3637 so that an investigation can be initiated.

LATEX STATEMENT: As of January 1, 2006, DuPont production specifications exclude use of components containing natural rubber latex in the manufacture of DuPont™ Tyvek™ IsoClean®, Sierra®, and ProClean® garments.

WARNINGS:

- 1) Tyvek®, ProShield® NexGen®, ProShield® 3 and ProShield® Basic garments are not flame resistant and should not be used around heat, flame, sparks or in potentially flammable or explosive environments.
- 2) Garments made of Tyvek®, ProShield® NexGen®, ProShield®, ProShield® Basic and Tempo® should have slip-resistant or anti-slip materials on the outer surface of boots, shoe covers or other garment surfaces in conditions where slipping may occur.
- 3) Tychem® should not be used around heat, flames, sparks or in potentially flammable or explosive environments. Only Tychem® ThermoPro, Tychem® Reflector® and Tychem® TK styles 600T/601T (with aluminized outer suit) garments are designed and tested to help reduce injury during escape from a flash fire. Users of Tychem® ThermoPro, Tychem® Reflector® and Tychem® TK styles 600T/601T (with aluminized outer suit) garments should not knowingly enter an explosive environment. Consult the Tychem® user manual, located on our website, for instructions on proper use, care and maintenance of your Tychem® garments.
- 4) Some Tychem® garments have attached socks made of the garment material. These attached socks must be worn inside protective outer footwear and are not suitable as outer footwear. These attached socks do not have adequate durability or slip resistance to be worn as the outer foot covering.
- 5) DuPont™ Tyvek® coveralls can be considered for use with the appropriate respirators and other suitable PPE to minimize contact with isocyanate paint aerosols. Tyvek® garments are not appropriate if they are getting wet (paint is dripping or running, or wet to the touch) or if spotting is observed on skin or garments worn under the coveralls. Tychem® aprons and smocks are available for situations where prolonged liquid exposure may be limited to the front of the torso and/or arms of the wearer. These aprons and smocks can be worn with Tyvek® to provide localized protection while limiting the level of thermal discomfort.

PRODUCT LINE BY HAZARD

DUPONT™ TYCHEM® CHEMICAL PROTECTION PRODUCTS

Garment	Typical chemical hazards/Examples								NFPA Ensembles						
	Hazardous dry powders & solids	Bloodborne pathogens & biohazards	Light chemical splash & aerosols	Moderate liquid chemical splash	Potential flash fire exposure & liquid organic chemicals	Heavy liquid chemical splash (toxics & corrosives)	ChemBio & warfare agents	Chemical vapors & gases (toxics & corrosives)							
Brands / Exposure	Dry pharma chemicals	Blood, saliva, human excrement	Inorganic acids and bases, salts	Organics, solvents	Meth-amphetamine	Known carcinogens	Sarin, Mustard, VX nerve agent	Chlorine, anhydrous ammonia	1991 Flash fire option	1991 Liq. gas option	1992	1994 Class 2	2112	70E Cat 2	
Tychem® QC	●	●	●*												
Tychem® SL	●	●	●*												
Tychem® F	○	●	○	●			●								
Tychem® ThermoPro	○	○	○	●	●		●				●		●	●	
Tychem® CPF 3	○	●	○	●			○				●				
Tychem® BR	○	○	○	●		○	●				●	●			
Tychem® Responder® CSM	○	○	○	●		●	●	●							
Tychem® TK	○	○	○	●	○**	●	●	●	●**	●		●			
Tychem® Reflector®	○	○	○	●	●**	●	●	●	●**	●					

● Generally preferred ○ Acceptable for use

*Serged and/or bound seams are degraded by some hazardous liquid chemicals, such as strong acids, and should not be worn when these chemicals are present.

**Tychem® Reflector® RF600T and Tychem® TK600T/TK601T have NFPA 1991 flash fire option.



TM127S

TEMPRO®

- Lightweight, disposable overgarment designed to help protect and preserve primary flame-resistant garments
- Provides a barrier against non-hazardous particles and aerosols while not contributing to burn injury
- Won't ignite and continue to burn when exposed to a flame source
- Temprom® is blue

Coverall¹
TM120SBUX002500
 Serged seams
 Collar
 Front zipper closure
 SM-6X




Coverall¹
TM127SBUX002500
 Serged seams
 Attached hood
 Front zipper closure
 Elastic wrists
 Elastic ankles
 SM-6X



Coverall¹
TM122SBUX002500
 Serged seams
 Attached hood
 Front zipper closure
 Elastic wrists
 Elastic ankles
 Attached sock boots²
 SM-7X



Level of protection

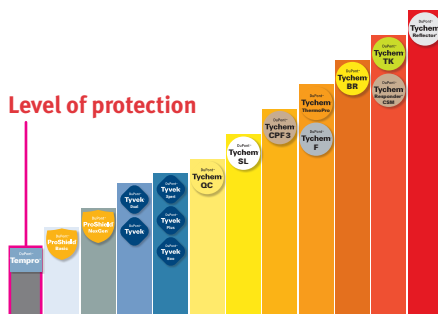

Temprom® garments are flame retardant treated, not inherently flame resistant, and are intended to be worn over your primary flame-resistant garments.

Serged and/or bound seams are degraded by some hazardous liquid chemicals, such as strong acids, and should not be worn when these chemicals are present.

¹Styles do not have storm flaps.

²These Temprom® garments have attached socks made of the garment material. These attached socks must be worn inside protective outer footwear and are not suitable as outer footwear. These attached socks do not have adequate durability or slip resistance to be worn as the outer foot covering.

Note: Not all sizes available in all styles.

DUPONT™ PROSHIELD® BASIC



PB125S

Coverall

PB120SBUX002500
PB120SWHXX002500


Serged seams
Collar
Front zipper closure
Storm flap
MD-5X



Coverall

PB125SBUX002500
PB125SWHXX002500

Serged seams
Collar
Front zipper closure
Storm flap
Elastic wrists
Elastic ankles
MD-5X



Coverall

PB127SBUX002500
PB127SGYXX002500
PB127SWHXX002500

Serged seams
Attached hood
Front zipper closure
Storm flap
Elastic wrists
Elastic ankles
MD-5X



Coverall

PB122SBUX002500
PB122SWHXX002500

Serged seams
Attached hood
Front zipper closure
Storm flap
Elastic wrists
Elastic ankles
Attached skid-resistant boots
MD-5X



PROSHIELD® BASIC

- Comfort and quality at an affordable price
- Spunbond-meltblown-spunbond (SMS) garments
- Uses include general maintenance, janitorial/cleaning and other dirty work assignments
- ProShield® Basic is available in blue or white, and gray in style 127

Labcoat

PB212SBUX003000


Serged seams
Collar
Front snap closure
Two pockets
Available in blue only
SM-7X



Labcoat

PB219SBUX003000
PB219SWHXX003000

Serged seams
Knit collar
Set sleeve
Knit cuff
Front snap closure
(6 + 1 adjustable)
Pockets (1 left chest pencil,
2 lower front)
SM-4X



Frock

PB267SBUX003000
PB267SWHXX003000


Serged seams
Mandarin collar
Set sleeve
Knit cuff
Enclosed elastic wrist
Front snap closure
(6 + 1 adjustable)
SM-4X




Frock

PB271SBUX003000
PB271SWHXX003000

Serged seams
Mandarin collar
Front zipper closure
Elastic wrists
MD-4X



Level of protection

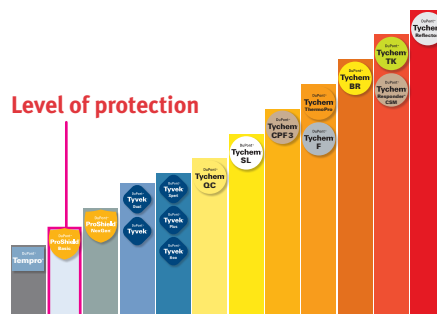



P3452S

PROSHIELD® 3

- Skid-resistant material for shoe/boot covers to help prevent slipping
- Provides non-hazardous liquid splash protection
- ProShield® 3 is gray
- LG = 8.25" high shoe cover

Shoe cover

P3450SGYXX020000

Serged seams
Elastic opening
5" height
ProShield® 3 fabric
Skid resistant
One size fits most



Shoe cover

P3450SGYXX0200LG

Serged seams
Elastic opening
8.25" height
ProShield® 3 fabric
Skid resistant
One size fits most



Boot cover

P3452SGYXX010000


Serged seams
Elastic opening
10" height
ProShield® 3 fabric
Skid resistant
One size fits most



Boot cover

P3454SGYXX010000

Serged seams
Elastic opening
18" height
ProShield® 3 fabric
Skid resistant
One size fits most



Bound and sewn seams and closures have less barrier than fabric. Serged and/or bound seams are degraded by some hazardous liquid chemicals, such as strong acids, and should not be worn when these chemicals are present.

WARNING: ProShield® 3 should not be used around heat, flames, sparks or in potentially flammable or explosive environments.



NG127S

PROSHIELD® NEXGEN®

- Barrier against a variety of non-hazardous aerosols, liquids and dry particles
- Microporous film laminated to a nonwoven fabric
- Uses include automotive refinishing, waste cleanup and sanitation engineering
- ProShield® NexGen® is white
- NP = Respirator fit hood and storm flap

Coverall NG120SWHXX002500

Serged seams
Collar
Front zipper closure
SM-6X



Coverall NG125SWHXX002500

Serged seams
Collar
Front zipper closure
Elastic wrists
Elastic ankles
SM-5X



Coverall NG127SWHXX0025NP

Serged seams
Attached hood (respirator fit)¹
Front zipper closure
Storm flap
Elastic wrists
Elastic ankles
SM-7X



Coverall NG122SWHXX002500

Serged seams
Attached hood
Front zipper closure
Elastic wrists
Elastic ankles
Attached skid-resistant boots
SM-6X



Apron NG273BWHXX010000

Bound seams
Bound neck and ties
Bib style
28" x 36"
One size fits most



Labcoat NG212SWHXX003000

Serged seams
Collar
Front snap closure
Two pockets
SM-4X



Sleeve NG500SWHXX020000

Serged seams
Elastic top
Elastic wrist
18" length
One size fits most




Shoe cover NG451SWHXX020000

Serged seams
Elastic opening
5" height
ProShield® NexGen® fabric shaft
PVC sole
SM-XL




Boot cover NG456SWHXX010000

Serged seams
Elastic opening
Elastic ankle
18" height
ProShield® NexGen® fabric shaft
PVC sole
SM-XL



Level of protection

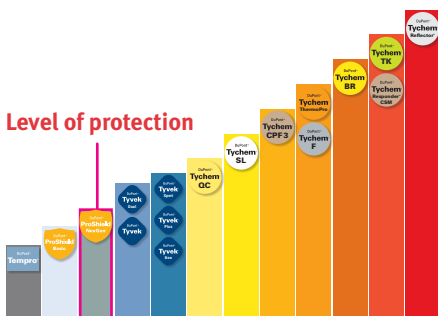

¹Respirator fit hoods are designed with a longer zipper, extending to the chin for complete coverage of the neck area. Standard hoods only extend to the neck. See page 5 for photos.

Bound and sewn seams and closures have less barrier than fabric.

Serged and/or bound seams are degraded by some hazardous liquid chemicals, such as strong acids, and should not be worn when these chemicals are present.

Note: Not all sizes available in all styles.

WARNING: ProShield® NexGen® should not be used around heat, flames, sparks or in potentially flammable or explosive environments. Garments made of ProShield® NexGen® fabric should have slip-resistant or anti-slip materials on the outer surface of boots, shoe covers, or other garment surfaces in conditions where slipping could occur.



TYVEK® DUAL

- Tyvek® Dual garments provide an ideal balance of comfort, durability and protection for workers
- *Comfort fit* design helps enable a greater range of movement while stretching and bending
- Designed for very specific applications where demanding comfort requirements are combined with limited protective requirements for frontal exposures
- Well suited for workers who are involved in a variety of strenuous activities that can lead to heat stress in applications that include:
 - Wind turbines
 - Composites manufacturing
 - Boat manufacturing
 - Remediation
 - Utilities
 - Maintenance
 - Glass manufacturing

DuPont™ Tyvek® fabric on the front

- Tyvek® fabric is composed of flashspun high-density polyethylene, which creates a unique nonwoven material available only from DuPont
- Tyvek® fabric provides an ideal balance of protection, durability and comfort compared to any limited-use fabric technology
- Tyvek® fabric's durability delivers a consistently better barrier, even after wear and abrasion
- Tyvek® is white

DuPont™ ProShield® Basic fabric on the back

- ProShield® fabric has been optimized for comfort, softness and breathability
- ProShield® fabric is designed for non-hazardous dry particle and light liquid splash applications
- ProShield® is made from a polypropylene spunbond-meltblown-spunbond (SMS) fabric
- ProShield® is blue

Coverall TD125SWBXX0025CM

Serged seams
Collar
Front zipper closure
Storm flap
Thumb loops
Elastic wrists
Elastic ankles
Elastic waist
MD-4X




Coverall TD127SWBXX0025CM

Serged seams
Attached hood (respirator fit)¹
Front zipper closure
Storm flap
Thumb loops
Elastic wrists
Elastic ankles
Elastic waist
MD-4X



Level of protection

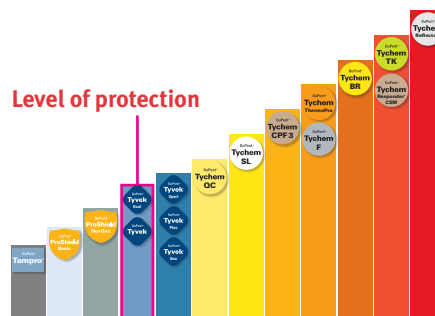

¹**Respirator fit hoods** are designed with a longer zipper, extending to the chin for complete coverage of the neck area. **Standard hoods** only extend to the neck. See page 5 for photos. Serged and/or bound seams are degraded by some hazardous liquid chemicals, such as strong acids, and should not be worn when these chemicals are present.

Note: Not all sizes available in all styles.

WARNING: Tyvek® and ProShield® should not be used around heat, flames, sparks or in potentially flammable or explosive environments. Garments made of Tyvek® and ProShield® fabrics should have slip-resistant or anti-slip materials on the outer surface of boots, shoe covers, or other garment surfaces in conditions where slipping could occur.

Certain accessory items are also identified as Make to Order. Stock/Make to Order designations are based on sales volume and production efficiencies. Therefore, designations are subject to change without notice.



TY120S

TYVEK®

- An ideal balance of protection, durability and comfort
- *Comfort fit* design allows for a greater range of motion and fewer blowouts
- Breathable inherent barrier protection against hazardous dry particles, aerosols and non-hazardous light liquid splash
- Excellent abrasion resistance; protects against hazardous particles down to one micron in size
- When used with other PPE, can help reduce risk of cross-contamination in pandemic response activities
- One garment for many applications:
 - General maintenance/operations
 - Microcrystalline silica
 - Lead abatement
 - Environmental cleanup
 - Agriculture
 - Asbestos abatement
 - Food processing
 - Mold remediation
 - Spray painting
 - Crime scene investigation
- Tyvek® is white
- G1 = Reduced case quantity
- NF = NAFTA/TAA compliant
- NS = Non-skid material
- RP = Retail packaged
- VP = Vend packed



Coverall

TY120SWHXX002500 MD-7X
TY120SWHXX0006G1 MD-4X
TY120SWHXX0025NF MD-7X
TY120SWHXX0006RP L/XL and 2X
TY120SWHXX0025VP MD-7X
 Serged seams
 Collar
 Front zipper closure
 Storm flap
 Elastic waist
 Comfort fit design



Coverall

TY121SWHXX0025NS
 Serged seams
 Collar
 Front zipper closure
 Storm flap
 Elastic wrists
 Elastic ankles
 Attached skid-resistant boots
 MD-7X



Coverall

TY122SWHXX002500 MD-7X
TY122SWHXX0006G1 MD-4X
TY122SWHXX0025NF MD-7X
TY122SWHXX0025VP MD-7X
 Serged seams
 Attached hood (respirator fit)¹
 Front zipper closure
 Storm flap
 Elastic wrists
 Elastic ankles
 Elastic waist
 Attached skid-resistant boots
 Comfort fit design



Coverall

TY125SWHXX002500 MD-7X
TY125SWHXX0006G1 MD-4X
TY125SWHXX0025VP MD-7X
 Serged seams
 Collar
 Front zipper closure
 Storm flap
 Elastic wrists
 Elastic ankles
 Elastic waist
 Comfort fit design



Coverall

TY127SWHXX002500 MD-7X
TY127SWHXX0006G1 MD-4X
TY127SWHXX0025NF MD-7X
TY127SWHXX0006RP L/XL and 2X
TY127SWHXX0025VP MD-7X
 Serged seams
 Attached hood (respirator fit)¹
 Front zipper closure
 Storm flap
 Elastic wrists
 Elastic ankles
 Elastic waist
 Comfort fit design




Coverall

TY151SWHXX002500
 Serged seams
 Collar
 Front snap closure
 XL-3X



Level of protection

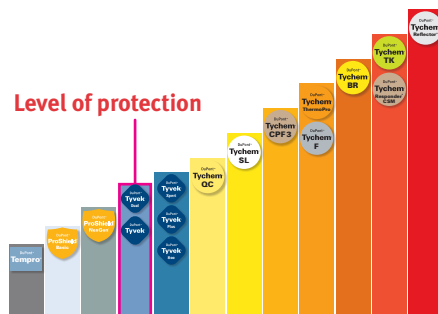

Only NF option codes are NAFTA/TAA compliant.

¹Respirator fit hoods are designed with a longer zipper, extending to the chin for complete coverage of the neck area. Standard hoods only extend to the neck. See page 5 for photos. Serged and/or bound seams are degraded by some hazardous liquid chemicals, such as strong acids, and should not be worn when these chemicals are present.

Note: Not all sizes available in all styles.

WARNING: Tyvek® and ProShield® should not be used around heat, flames, sparks or in potentially flammable or explosive environments. Garments made of Tyvek® and ProShield® fabrics should have slip-resistant or anti-slip materials on the outer surface of boots, shoe covers, or other garment surfaces in conditions where slipping could occur.

Certain accessory items are also identified as Make to Order. Stock/Make to Order designations are based on sales volume and production efficiencies. Therefore, designations are subject to change without notice.



TY210SWHXX003000 SM-7X
TY210SWHXX0030VP MD-4X
 Serged seams
 Collar
 Front snap closure



TY211SWHXX003000
Serged seams
Collar
Front snap closure
Elastic wrists
Knee length
SM-7X



TY216SWHXX003000
Serged seams
Mandarin collar
Front snap closure
Elastic wrists
SM-5X



TY212SWHXX003000 SM-7X
TY212SWHXX0008G1 MD-4X
TY212SWHXX0030VP MD-4X
TY212SWHXX0030NF SM-7X
 Serged seams
 Collar
 Front snap closure
 Two pockets



TY303SWHXX005000 SM-7X
TY303SWHXX0012G1 MD-4X
TY303SWHXX0050VP MD-3X
 Serged seams
 Collar
 Front snap closure
 Long sleeve



TY350SWHXX005000 SM-7X
TY350SWHXX0012G1 MD-4X
TY350SWHXX0050VP MD-3X
 Serged seams
 Elastic waist




TY273BWHXX010000
TY273BWHXX0100VP
Bound seams
Bound neck & ties
Bib style
28" x 36"
One size fits most



TY500SWHXX020000
TY500SWHXX0200NF
Serged seams
Elastic top
Elastic wrist
18" length
One size fits most



TY657SWHXX010000
Serged seams
Pullover
Elastic face
Shoulder length
One size fits most

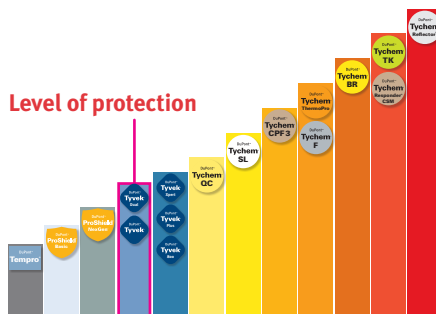

¹**Respirator fit hoods** are designed with a longer zipper, extending to the chin for complete coverage of the neck area. **Standard hoods** only extend to the neck. See page 5 for photos.

Bound and sewn seams and closures have less barrier than fabric. Serged and/or bound seams are degraded by some hazardous liquid chemicals, such as strong acids, and should not be worn when these chemicals are present.

Note: Not all sizes available in all styles.

WARNING: Tyvek® should not be used around heat, flames, sparks or in potentially flammable or explosive environments. Garments made of Tyvek® fabrics should have slip-resistant or anti-slip materials on the outer surface of boots, shoe covers, or other garment surfaces in conditions where slipping could occur.

Certain accessory items are also identified as Make to Order. Stock/Make to Order designations are based on sales volume and production efficiencies. Therefore, designations are subject to change without notice.

DUPONT™ TYVEK® BOOT AND SHOE COVERS



FC454S

TYVEK® FC

- Skid-resistant materials for shoe/ boot covers to prevent slipping
- Tyvek® with Friction Coating
- Tyvek® FC is gray
- LG = 8.25" high shoe cover
- NF = NAFTA/TAA Compliant
- RP = Retail packaged
- SR = Skid resistant

Shoe cover

TY450SWHXX020000

Tyvek® fabric
Serged seams
Elastic opening
5" height
One size fits most



Shoe cover

TY450SWHXX0200LG

Tyvek® fabric
Serged seams
Elastic opening
8.25" height
One size fits most



Shoe Cover

TY451SWHXX0024RP

Serged seam
Gripper™ skid-resistant sole
5" high
Elastic opening
Retail packaged
One size fits most



Boot cover

TY452SWHXX010000


Tyvek® fabric
Serged seams
Elastic opening
10" height
One size fits most



Boot cover

TY454SWHXX010000


Tyvek® fabric
Serged seams
Elastic opening
18" height
One size fits most



Boot cover

TY454SWHXX0100SR


Tyvek® fabric
Tyvek® FC sole
Serged seams
Elastic opening
Elastic ankle
18" height
Skid resistant
LG-XL



Shoe cover—Tyvek® FC

FC450SGYXX020000

Tyvek® FC fabric
Serged seams
Elastic opening
Elastic toe, sole and heel seam
5" height
Skid resistant
One size fits most



Boot cover—Tyvek® FC

FC454SGYXX010000

Tyvek® FC fabric
Serged seams
Elastic opening
18" height
Skid resistant
One size fits most



Only NF option codes are NAFTA/TAA compliant.


Serged and/or bound seams are degraded by some hazardous liquid chemicals, such as strong acids, and should not be worn when these chemicals are present.

Tyvek® with Friction Coating (FC) has been specially treated to promote ink/coating adhesion. This treatment lowers the typical bulk liquid holdout values for Tyvek® fabric. Products with this treatment offer limited bulk liquid holdout. If barrier protection from liquid splash is required, please consider a non-treated Tyvek® style or other substrate.

WARNING: Tyvek® should not be used around heat, flames, sparks or in potentially flammable or explosive environments. Garments made of Tyvek® fabrics should have slip-resistant or anti-slip materials on the outer surface of boots, shoe covers, or other garment surfaces in conditions where slipping could occur.

Certain accessory items are also identified as Make to Order. Stock/Make to Order designations are based on sales volume and production efficiencies. Therefore, designations are subject to change without notice.

Level of protection

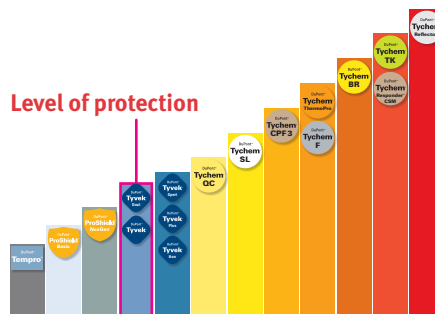

DUPONT™ TYVEK® XPRT / TYVEK® PLUS



TY198S



TY198T

TYVEK® XPERT

- Tyvek® Xpert garments are composed of flashspun high-density polyethylene, which creates a unique, nonwoven material available only from DuPont
- Suitable for applications such as pharmaceutical handling, chemical processing, automatic spray painting, maintenance and many others
- Chemical protective clothing, Category III Type 5-B and 6-B
- Tyvek® is white

TYVEK® PLUS

- Tyvek® Plus garments are composed of flashspun high-density polyethylene, which creates a unique, nonwoven material available only from DuPont
- Tyvek® Plus Type 4/5/6 coveralls offer the following safety and comfort benefits:
 - Chemical protective clothing, Category III Type 4-B, 5-B and 6-B
 - Protection against infective agents (EN 14126), including resistance to penetration by blood and body fluids using synthetic blood (ISO 16603)
 - Fabric and seams offer chemical permeation barrier to low concentration water-based inorganic chemicals
- Tyvek® is white
- RP = Retail packaged

Coverall

TY198SWHXX002500

External serged seam
Attached hood
Storm flap
Elastic wrists
Elastic ankles
CE certified
Category III Type 5-B and 6-B
SM-7X




Coverall

TY198TWHX002500

Taped seam
Attached hood (respirator fit)¹
Storm flap
Elastic wrists
Elastic ankles
CE certified
Category III Type 4-B,
5-B and 6-B
SM-7X



Level of protection

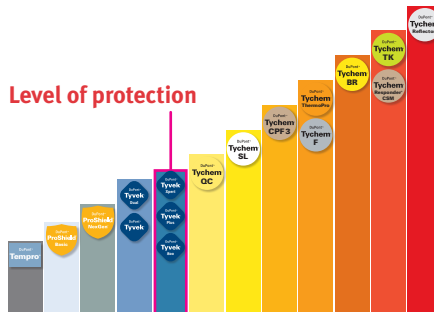

¹**Respirator fit hoods** are designed with a longer zipper, extending to the chin for complete coverage of the neck area. **Standard hoods** only extend to the neck. See page 5 for photos.

Bound and sewn seams and closures have less barrier than fabric. Serged and/or bound seams are degraded by some hazardous liquid chemicals, such as strong acids, and should not be worn when these chemicals are present.

Note: Not all sizes available in all styles.

WARNING: Tyvek® should not be used around heat, flames, sparks or in potentially flammable or explosive environments. Garments made of Tyvek® fabrics should have slip-resistant or anti-slip materials on the outer surface of boots, shoe covers, or other garment surfaces in conditions where slipping could occur.


Certain accessory items are also identified as Make to Order. Stock/Make to Order designations are based on sales volume and production efficiencies. Therefore, designations are subject to change without notice.



TJCHA5TWHXX000800



- Tyvek® 800 J garments combine resistance to low-concentration, water-based, inorganic chemicals (even under pressure) with the durability of Tyvek® thanks to their innovative fabric technology and enhanced garment design
- Chemical protective clothing, Category III Type 3-B, 4-B, 5-B and 6-B
- Suitable for applications such as industrial cleaning; chemical packaging and redistribution; waste treatment and disposal; environmental remediation and many others
- Tyvek® is white

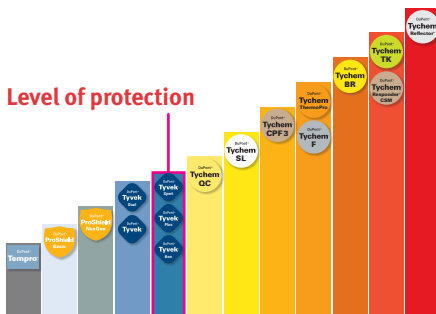

Certain accessory items are also identified as Make to Order. Stock/Make to Order designations are based on sales volume and production efficiencies. Therefore, designations are subject to change without notice.



QC120S

Coverall
QC120SYLXX001200
 Serged seams
 Collar
 Front zipper closure
 SM-7X



Coverall
QC120BYLXX001200
 Bound seams
 Collar
 Front zipper closure
 Storm flap with tape closure
 MD-7X



Coverall
QC125SYLXX001200 MD-7X
QC125SYLXX0006RP L/XL and 2X
 Serged seams
 Collar
 Front zipper closure
 Storm flap
 Elastic wrists
 Elastic ankles



Coverall
QC125BYLXX001200
 Bound seams, MD-6X
QC125TYLXX000400
 Taped seams, MD-7X
 Collar
 Front zipper closure
 Storm flap with tape closure
 Elastic wrists
 Elastic ankles



TYCHEM® QC

- Light liquid splash protection
- Used extensively in the petroleum; pulp and paper; food and chemical processing; and pharmaceutical industries
- Tychem® QC is polyethylene-coated Tyvek® fabric
- Flexible, durable and lightweight
- Tychem® QC provides at least 30 minutes of protection against >40 chemical challenges
- When used with other PPE, can help reduce the risk of cross-contamination in pandemic preparedness activities
- Meets ASTM F1670 and ASTM F1671 tests, offering bloodborne pathogen protection
- Tychem® QC is yellow for high visibility
- BN = Berry Amendment compliant
- RP = Retail packaged



Coverall
QC122SYLXX001200
 Serged seams
 Attached hood
 Front zipper closure
 Storm flap
 Elastic wrists
 Attached socks¹
 MD-7X



Please note that Tychem® fabrics have different permeation performance. Please check SafeSPEC® on our website for permeation data that meets your specific needs.

Stock/Made to Order designations are based on sales volume and production efficiencies. Therefore, designations are subject to change without notice.

¹These Tychem® garments have attached socks made of the garment material. These attached socks must be worn inside protective outer footwear and are not suitable as outer footwear. These attached socks do not have adequate durability or slip resistance to be worn as the outer foot covering.


Storm flaps: All standard bound and taped seam coveralls have a single storm flap with a pressure-sensitive tape closure. Serged seam coveralls do not have a storm flap.

Seams and closures have less barrier than fabric.

Serged and/or bound seams are degraded by some hazardous liquid chemicals, such as strong acids, and should not be worn when these chemicals are present.

Note: Not all sizes available in all styles.

WARNING: Tychem® should not be used around heat, flames, sparks or in potentially flammable or explosive environments. Only Tychem® ThermoPro, Tychem® Reflector® and Tychem® TK styles 600T/601T (with aluminized outer suit) garments are designed and tested to help reduce injury during escape from a flash fire. Users of Tychem® ThermoPro, Tychem® Reflector® and Tychem® TK styles 600T/601T (with aluminized outer suit) garments should not knowingly enter an explosive environment. Consult the Tychem® user manual, located on our website, for instructions on proper use, care and maintenance of your Tychem® garments.

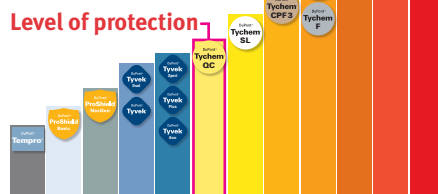



QC122BYL

Coverall

QC122BYLXX001200

Bound seams, MD-6X

QC122BYLXX0012BN

Bound seams, MD-6X

QC122TYLXX000400

Taped seams, MD-6X

Attached hood

Front zipper closure

Storm flap with tape closure

Elastic wrists

Attached socks¹



Coverall

QC127BYLXX001200

Bound seams

QC127TYLXX000400

Taped seams

Attached hood

Front zipper closure

Storm flap

Elastic wrists

Elastic ankles

MD-7X



Coverall

QC127SYLXX001200 MD-7X

QC127SYLXX0006RP L/XL and 2X

Serged seams

Attached hood

Front zipper closure

Elastic wrists

Elastic ankles



Apron


QC273BYLXX010000

Bound neck & ties

Bib style

36" long

One size fits most



Apron

QC275BYLXX002500

Bound seams

Raw edge neck with snaps

Attached long sleeves

Waist ties

Elastic wrists

44" long

SM-4X



Apron

QC278BYLXX001200

Bound seams

Attached long sleeves

Bound yoke neck without snaps

Waist ties

Elastic wrists

52" long

One size fits most



Sleeve

QC500BYLXX020000

Bound seam

Elastic top

Elastic wrist

18" length

One size fits most



Only BN option codes are Berry Amendment compliant.

Please note that Tychem® fabrics have different permeation performance. Please check SafeSPEC™ on our website for permeation data that meets your specific needs.

Stock/Make to Order designations are based on sales volume and production efficiencies. Therefore, designations are subject to change without notice.

¹These Tychem® garments have attached socks made of the garment material. These attached socks must be worn inside protective outer footwear and are not suitable as outer footwear. These attached socks do not have adequate durability or slip resistance to be worn as the outer foot covering.

Storm flaps: All standard bound and taped seam coveralls have a single storm flap with a pressure-sensitive tape closure. Serged seam coveralls do not have a storm flap.


Seams and closures have less barrier than fabric.

Serged and/or bound seams are degraded by some hazardous liquid chemicals, such as strong acids, and should not be worn when these chemicals are present.

Note: Not all sizes available in all styles.

WARNING: Tychem® should not be used around heat, flames, sparks or in potentially flammable or explosive environments. Only Tychem® ThermoPro, Tychem® Reflector® and Tychem® TK styles 600T/601T (with aluminized outer suit) garments are designed and tested to help reduce injury during escape from a flash fire. Users of Tychem® ThermoPro, Tychem® Reflector® and Tychem® TK styles 600T/601T (with aluminized outer suit) garments should not knowingly enter an explosive environment. Consult the Tychem® user manual, located on our website, for instructions on proper use, care and maintenance of your Tychem® garments.

Level of protection

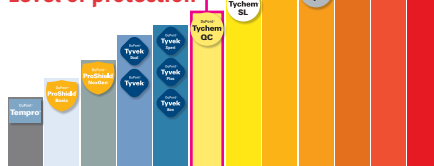



SL122T

SL120T



TYCHEM® SL

- Effective protection against a range of chemicals
- Uses include waste management, hazardous response and nuclear environments
- Tychem® SL is Saranex™ 23-P film laminated to Tyvek® fabric
- Rugged and durable
- Tychem® SL is white for high visibility
- Tychem® SL provides at least 30 minutes of protection against >120 chemical challenges
- When used with other PPE, can help reduce the risk of cross-contamination in pandemic preparedness activities
- Meets ASTM F1670 and ASTM F1671 tests, offering bloodborne pathogen protection
- BN = Berry Amendment compliant



Coverall

SL121BWHXX001200

Bound seams, MD-6X

SL121TWHXX000400

Taped seams, MD-5X

Collar

Front zipper closure

Storm flap with tape closure

Elastic wrists

Attached socks¹



Coverall

SL122BWHXX0012BN

Bound seams

SL122TWHXX0006BN

Taped seams

Attached hood

Front zipper closure

Storm flap with tape closure

Elastic wrists

Attached socks¹

MD-7X



Coverall

SL120BWHXX001200

Bound seams, SM-6X

SL120TWHXX000400

Taped seams, MD-4X

Collar

Front zipper closure

Storm flap with tape closure



Coverall

SL125BWHXX001200

Bound seams, SM-6X

SL125TWHXX000600

Taped seams, MD-5X

Collar

Front zipper closure

Storm flap with tape closure

Elastic wrists

Elastic ankles



Coverall

SL122BWHXX001200

Bound seams, MD-7X

SL122TWHXX000600

Taped seams, MD-6X

Attached hood

Front zipper closure

Storm flap with tape closure

Elastic wrists

Attached socks¹



Only BN option codes are Berry Amendment compliant.

Please note that Tychem® fabrics have different permeation performance. Please check SafeSPEC™ on our website for permeation data that meets your specific needs.

Stock/Made to Order designations are based on sales volume and production efficiencies. Therefore, designations are subject to change without notice.

¹These Tychem® garments have attached socks made of the garment material. These attached socks must be worn inside protective outer footwear and are not suitable as outer footwear. These attached socks do not have adequate durability or slip resistance to be worn as the outer foot covering.

Storm flaps: All standard bound and taped seam coveralls have a single storm flap with a pressure-sensitive tape closure.


Seams and closures have less barrier than fabric.

Serged and/or bound seams are degraded by some hazardous liquid chemicals, such as strong acids, and should not be worn when these chemicals are present.

Note: Not all sizes available in all styles.

WARNING: Tychem® should not be used around heat, flames, sparks or in potentially flammable or explosive environments. Only Tychem® ThermoPro, Tychem® Reflector® and Tychem® TK styles 600T/601T (with aluminized outer suit) garments are designed and tested to help reduce injury during escape from a flash fire. Users of Tychem® ThermoPro, Tychem® Reflector® and Tychem® TK styles 600T/601T (with aluminized outer suit) garments should not knowingly enter an explosive environment. Consult the Tychem® user manual, located on our website, for instructions on proper use, care and maintenance of your Tychem® garments.

Level of protection

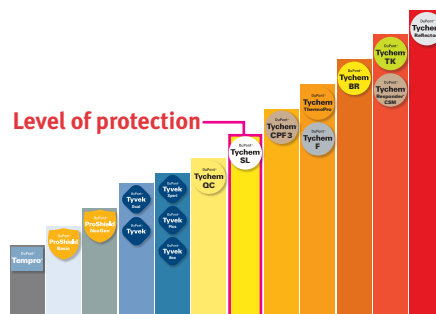



SL127B

Coverall

SL127BWHXX001200

Bound seams

SL127TWHXX000600

Taped seams

Attached hood

Front zipper closure

Storm flap with tape closure

Elastic wrists

Elastic ankles

MD-7X



Coverall

SL128TWHXX000600

Taped seams

Attached hood (respirator fit)²

Front zipper closure

Storm flap with tape closure

Elastic wrists

Attached socks¹

Outer boot flaps with elastic

SM-5X



Apron

SL274BWHXX005000

Bound neck & ties

Bib style

36" long

One size fits most



Apron

SL275TWHXX002500

Taped seams

Raw edge neck with snaps


Attached long sleeves

Waist ties

Elastic wrists

44" long

SM-4X



Apron

SL278BWHXX001200

Bound seams

Bound yoke neck without snaps

Attached long sleeves

Waist ties

Elastic wrists

52" long

One size fits most



Please note that Tychem® fabrics have different permeation performance. Please check SafeSPEC™ on our website for permeation data that meets your specific needs.

Stock/Made to Order designations are based on sales volume and production efficiencies. Therefore, designations are subject to change without notice.

¹These Tychem® garments have attached socks made of the garment material. These attached socks must be worn inside protective outer footwear and are not suitable as outer footwear. These attached socks do not have adequate durability or slip resistance to be worn as the outer foot covering.

²**Respirator fit hoods** are designed with a longer zipper, extending to the chin for complete coverage of the neck area. **Standard hoods** only extend to the neck. See page 5 for photos.


Storm flaps: All standard bound and taped seam coveralls have a single storm flap with a pressure-sensitive tape closure.

Seams and closures have less barrier than fabric.

Serged and/or bound seams are degraded by some hazardous liquid chemicals, such as strong acids, and should not be worn when these chemicals are present.

Note: Not all sizes available in all styles.

WARNING: Tychem® should not be used around heat, flames, sparks or in potentially flammable or explosive environments. Only Tychem® ThermoPro, Tychem® Reflector® and Tychem® TK styles 600T/601T (with aluminized outer suit) garments are designed and tested to help reduce injury during escape from a flash fire. Users of Tychem® ThermoPro, Tychem® Reflector® and Tychem® TK styles 600T/601T (with aluminized outer suit) garments should not knowingly enter an explosive environment. Consult the Tychem® user manual, located on our website, for instructions on proper use, care and maintenance of your Tychem® garments.

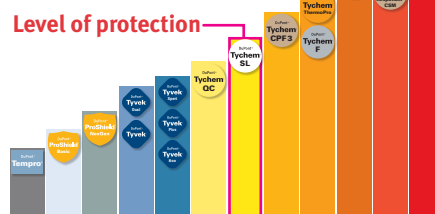



C3127T


TYCHEM® CPF 3

- Strong and durable garments with broad chemical barrier
- Tychem® CPF 3 is a multi-layer barrier film laminated to a durable polypropylene fabric
- Tychem® CPF 3 provides at least 30 minutes of protection against >145 chemical challenges
- Uses include chemical and petrochemical handling, hazardous materials/waste cleanup, industrial HazMat teams, utilities and domestic preparedness
- Tychem® CPF 3 is tan for discretionary purposes
- Tychem® CPF 3 198T/199T are certified to NFPA 1992
- 2K = Double storm flap w/zipper & hook-and-loop closure
- BN = Berry Amendment compliant
- JF = CPE sleeve cuff and jam fit glove insert

Hood

C3651TTNXX000600

Taped seams
EX (extra wide) faceshield (20 mil PVC)
Pullover
Hook-and-loop waist closure
One size fits most



Coverall

C3122TTNXX0006BN SM-5X
C3122TTNXX000600 SM-7X

Taped seams
Attached hood
Front zipper closure
Storm flap with tape closure
Elastic wrists
Attached socks¹



Coverall

C3125TTNXX000600

Taped seams
Collar
Front zipper closure
Storm flap with tape closure
Elastic wrists
Elastic ankles
SM-5X



Coverall

C3127TTNXX000600

Taped seams
Attached hood
Front zipper closure
Storm flap with tape closure
Elastic wrists
Elastic ankles
SM-7X



Coverall

C3128TTNXX000600
C3128TTNXX0006BN
C3128TTNXX00062K

Taped seams
Attached hood (respirator fit)²
Front zipper closure
Storm flap with tape closure
Elastic wrists
Attached socks¹
Outer boot flaps with elastic
SM-5X



Apron

C3275TTNXX000600

Taped seams
Bound snap neck
Attached long sleeves
Waist ties
Elastic wrists
44" long
SM-4X



Encapsulated Level B

C3525TTNXX000600

Front entry
Taped seams
Standard faceshield (20 mil PVC)
Zipper closure
Double storm flaps with hook-and-loop closure
One exhaust vent flat back
Elastic wrists
Elastic ankles
Air access left side
SM-4X

Front entry



Encapsulated Level B

C3526TTNXX000600

Rear entry
Taped seams
Standard faceshield (20 mil PVC)
Zipper closure
Double storm flaps with hook-and-loop closure
One exhaust vent
Flat back (airline access)
Elastic wrists
Attached socks¹
Outer boot flaps
SM-4X

Rear entry



Encapsulated Level B

C3528TTNXX000600

Rear entry
Taped seams
Standard faceshield (20 mil PVC)
Zipper closure
Double storm flaps with hook-and-loop closure
Two exhaust vents
Expanded back
Elastic wrists
Attached socks¹
Outer boot flaps
SM-4X

Rear entry




Bib overall

C3360TTNXX000600

Taped seams
Adjustable webbing straps with closure
SM-4X




Level of protection

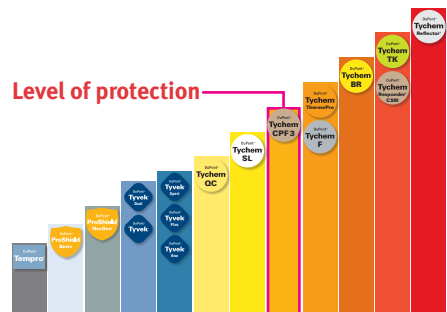



TYCHEM® CPF 3 HD DESIGN

- Tychem® CPF 3 HD garments are intended for use by law enforcement, HazMat and hospital personnel
- Offered in respirator fit hood or collar style for use with a PAPR; ideal for hospital first receiver applications
- Tychem® CPF 3 HD garments may include integrated gloves and improved closures to reduce response time; deliver a high level of dexterity and tactility; and improve protection
- BN = Berry Amendment compliant 
- WG = With gloves

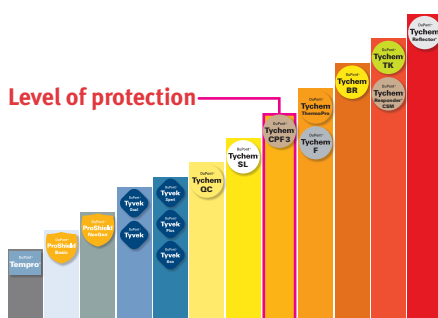

Jacket

C3670TTNXX000600 SM-4X
C3670TTNXX0006JF SM-4X

Taped seams
 Mandarin collar
 Front zipper closure
 Double storm flaps with hook-and-loop closure
 Elastic wrists



Coverall — HD design

C3184TTNXX000600
 Taped seams
 Collar
 Front zipper closure
 Double storm flaps with hook-and-loop closure
 Attached jam fit removable/field replaceable neoprene outer/multi-layer laminate inner gloves
 Attached socks¹
 Outer boot flaps
 SM-4X



Coverall HD design — Certified to NFPA 1992

C3198TTNXX000600
C3198TTNXX0006BN
 Taped seams
 Attached hood (respirator fit)²
 Front zipper closure
 Double storm flaps with hook-and-loop closure
 Elastic wrists
 Elastic ankles
 SM-5X



Coverall HD design — Certified to NFPA 1992

C3199TTNXX000600
C3199TTNXX0006BN
 Taped seams
 Attached hood (respirator fit)²
 Front zipper closure
 Double storm flaps with hook-and-loop closure
 Elastic wrists
 Attached socks¹
 Outer boot flaps
 SM-5X




Coverall HD design — Certified to NFPA 1992

C3199TTNXX0006WG
 Taped seams
 Attached hood (respirator fit)²
 Front zipper closure
 Double storm flaps with hook-and-loop closure
 Attached Guardian™ butyl outer/multi-layer laminate inner gloves
 Attached socks¹
 Outer boot flaps
 SM-5X



Combo suit (jacket and bib overall)

C3750TTNXX000600
JACKET
 Taped seams
 Mandarin collar
 Jam fit cuff
 Front zipper closure
 Double storm flaps
BIB OVERALL
 Taped seams
 Adjustable webbing straps with closure
 SM-4X



Coverall — HD design

C3185TTNXX000600
 Taped seams
 Attached hood (respirator fit)²
 Front zipper closure
 Double storm flaps with hook-and-loop closure
 Attached jam fit removable/field replaceable neoprene outer/multi-layer laminate inner gloves
 Attached socks¹
 Outer boot flaps
 SM-4X



Coverall HD design — Certified to NFPA 1992

C3198TTNXX0006WG
 Taped seams
 Attached hood (respirator fit)²
 Front zipper closure
 Double storm flaps with hook-and-loop closure
 Attached Guardian™ butyl outer/multi-layer laminate inner gloves
 Elastic ankles
 SM-5X



Only BN and WG option codes are Berry Amendment compliant.

Please note that Tychem® fabrics have different permeation performance. Please check SafeSPEC™ on our website for permeation data that meets your specific needs.

Stock/Made to Order designations are based on sales volume and production efficiencies. Therefore, designations are subject to change without notice.

¹These Tychem® garments have attached socks made of the garment material. These attached socks must be worn inside protective outer footwear and are not suitable as outer footwear. These attached socks do not have adequate durability or slip resistance to be worn as the outer foot covering.

²Respirator fit hoods are designed with a longer zipper, extending to the chin for complete coverage of the neck area. Standard hoods only extend to the neck. See page 5 for photos.

Storm flaps: All taped seam coveralls have a storm flap or double storm flap, see product description for details.

Seams and closures have less barrier than fabric.

Note: Not all sizes available in all styles.

WARNING: Tychem® should not be used around heat, flames, sparks or in potentially flammable or explosive environments. Only Tychem® ThermoPro, Tychem® Reflector® and Tychem® TK styles 600T/601T (with aluminized outer suit) garments are designed and tested to help reduce injury during escape from a flash fire. Users of Tychem® ThermoPro, Tychem® Reflector® and Tychem® TK styles 600T/601T (with aluminized outer suit) garments should not knowingly enter an explosive environment. Consult the Tychem® user manual, located on our website, for instructions on proper use, care and maintenance of your Tychem® garments.



TF145T



TF169T

TYCHEM® F

- Widely used by military personnel and first responders for chemical warfare situations
- Strong and durable garments with broad chemical barrier
- For use when potential exposure to industrial chemicals and chemical warfare agents exists
- Successfully tested by Soldier and Biological Chemical Command (SBCCOM) in Aberdeen, MD
- Tychem® F is a barrier film laminated to Tyvek®
- Tychem® F provides at least 30 minutes of protection against >180 chemical challenges
- Tychem® F is available in orange for high visibility and gray for discretionary purposes
- TV = TAA compliant 
- PI = Packaged individually

Coverall

TF145TGYXX0006TV
TF145TGYXX000600

Taped seams
Attached hood (respirator fit)²
Front zipper closure
Storm flap with tape closure
Elastic wrists
Elastic ankles
SM-5X



Coverall

TF169TGYXX0006TV
TF169TGYXX000600

Taped seams
Attached hood (respirator fit)²
Front zipper closure
Storm flap with tape closure
Elastic wrists
Attached socks¹
SM-5X



Coverall

TF186TGYXX0006PI

Taped seams
Attached hood (respirator fit)²
Front zipper closure
Storm flap with tape closure
Attached butyl gloves
Attached socks¹
Outer boot flaps
MD-5X



Only TV option codes are TAA compliant.

Please note that Tychem® fabrics have different permeation performance. Please check SafeSPEC™ on our website for permeation data that meets your specific needs.

Stock/Make to Order designations are based on sales volume and production efficiencies. Therefore, designations are subject to change without notice.

¹These Tychem® garments have attached socks made of the garment material. These attached socks must be worn inside protective outer footwear and are not suitable as outer footwear. These attached socks do not have adequate durability or slip resistance to be worn as the outer foot covering.

²Respirator fit hoods are designed with a longer zipper, extending to the chin for complete coverage of the neck area. Standard hoods only extend to the neck. See page 5 for photos.


Storm flaps: All taped seam coveralls have a single storm flap with a pressure-sensitive tape closure.

Seams and closures have less barrier than fabric.

Note: Not all sizes available in all styles.

WARNING: Tychem® should not be used around heat, flames, sparks or in potentially flammable or explosive environments. Only Tychem® ThermoPro, Tychem® Reflector® and Tychem® TK styles 600T/601T (with aluminized outer suit) garments are designed and tested to help reduce injury during escape from a flash fire. Users of Tychem® ThermoPro, Tychem® Reflector® and Tychem® TK styles 600T/601T (with aluminized outer suit) garments should not knowingly enter an explosive environment. Consult the Tychem® user manual, located on our website, for instructions on proper use, care and maintenance of your Tychem® garments.

Level of protection

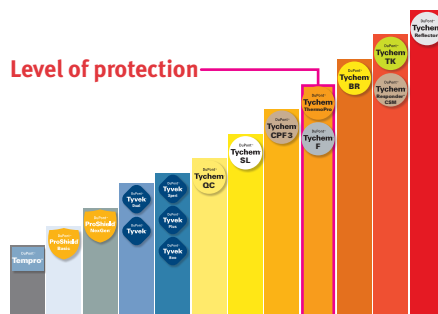



TYFCHA5T

Coverall

TYFCHA5TORXX002500

Taped seams
Attached hood (respirator fit)¹
Front zipper closure
Self-adhesive double zipper
Storm flap closure
Elastic wrists
Elastic ankles
Thumb loops
Chin flap
MD-2X



Gown

TYFPL50SGYXX002500

Taped seams
Wrap-over rear closure with tie
Partial body chemical protective clothing
Category III Type PB[3]
Shin length
SM and L/2X



Apron

TYFPA30SGYXX002500


No seams
Neck and waist ties
Shin length
One size fits most




Sleeve

TYFPS32SGYXX005000

Taped seam
Elastic top
Elastic wrist
18" length
One size fits most



Level of protection

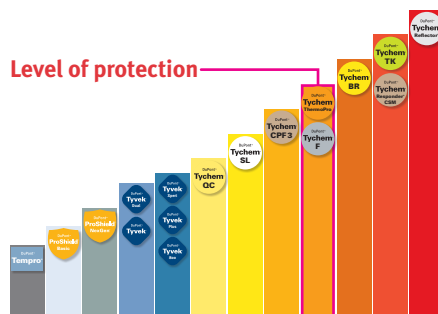

Please note that Tychem® fabrics have different permeation performance. Please check SafeSPEC™ on our website for permeation data that meets your specific needs.

Stock/Make to Order designations are based on sales volume and production efficiencies. Therefore, designations are subject to change without notice.

¹**Respirator fit hoods** are designed with a longer zipper, extending to the chin for complete coverage of the neck area. **Standard hoods** only extend to the neck. See page 5 for photos.

Storm flaps: All taped seam coveralls have a single storm flap with a pressure-sensitive tape closure.

Seams and closures have less barrier than fabric.

Note: Not all sizes available in all styles.

WARNING: Tychem® should not be used around heat, flames, sparks or in potentially flammable or explosive environments. Only Tychem® ThermoPro, Tychem® Reflector® and Tychem® TK styles 600T/601T (with aluminized outer suit) garments are designed and tested to help reduce injury during escape from a flash fire. Users of Tychem® ThermoPro, Tychem® Reflector® and Tychem® TK styles 600T/601T (with aluminized outer suit) garments should not knowingly enter an explosive environment. Consult the Tychem® user manual, located on our website, for instructions on proper use, care and maintenance of your Tychem® garments.



TP198T

**Coverall—
Certified to NFPA 1992,
NFPA 2112 and Meets
NFPA 70E Category 2**

Taped seams
Attached hood with drawstring
(respirator fit)²
Front zipper closure
Double storm flaps with
hook-and-loop closure
Elastic wrists
Hemmed ankles
SM-5X



**Coverall—
Certified to NFPA 1992,
NFPA 2112 and Meets
NFPA 70E Category 2**

Taped seams
Attached hood with drawstring
(respirator fit)²
Front zipper closure
Double storm flaps
with hook-and-loop closure
Elastic wrists
Attached socks¹
Outer boot flaps
SM-5X



TYCHEM® THERMOPRO

- Provides triple hazard protection from chemicals, flash fire and electric arc, combining the trusted chemical protection of DuPont™ Tychem® with the flame and arc flash protection of DuPont™ Nomex® into a single garment
- Tychem® ThermoPro 198T/199T meet the requirements of NFPA 1992 *Standard on Liquid-Splash Protective Ensembles and Clothing for Hazardous Materials Emergencies* and NFPA 2112, *Standard on Flame-Resistant Garments for Protection of Industrial Personnel Against Flash Fire*
- Tychem® ThermoPro 198T/199T exceed the Hazard Risk Category 2 requirement of 8 cal/cm² outlined in NFPA 70E, *Standard for Electrical Safety in the Workplace*
- Constructed for heavy use, yet lightweight and easy to wear
- Tychem® ThermoPro provides at least 30 minutes of protection against >180 chemical challenges
- Tychem® ThermoPro has an arc rating of 15.2 cal/cm² Ebt
- Tychem® ThermoPro is available in orange for high visibility and gray for discretionary purposes
- BN = Berry Amendment compliant

Only BN option codes are Berry Amendment compliant.

Please note that Tychem® fabrics have different permeation performance. Please check SafeSPEC™ on our website for permeation data that meets your specific needs.

Stock/Make to Order designations are based on sales volume and production efficiencies. Therefore, designations are subject to change without notice.


¹These Tychem® garments have attached socks made of the garment material. These attached socks must be worn inside protective outer footwear and are not suitable as outer footwear. These attached socks do not have adequate durability or slip resistance to be worn as the outer foot covering.

²**Respirator fit hoods** are designed with a longer zipper, extending to the chin for complete coverage of the neck area. **Standard hoods** only extend to the neck. See page 5 for photos.

Seams and closures have less barrier than fabric.

Note: Not all sizes available in all styles.

WARNING: Tychem™ should not be used around heat, flames, sparks or in potentially flammable or explosive environments. Only Tychem™ ThermoPro, Tychem™ Reflector™ and Tychem™ TK styles 600T/601T (with aluminized outer suit) garments are designed and tested to help reduce injury during escape from a flash fire. Users of Tychem™ ThermoPro, Tychem™ Reflector™ and Tychem™ TK styles 600T/601T (with aluminized outer suit) garments should not knowingly enter an explosive environment. Consult the Tychem™ user manual, located on our website, for instructions on proper use, care and maintenance of your Tychem™ garments.

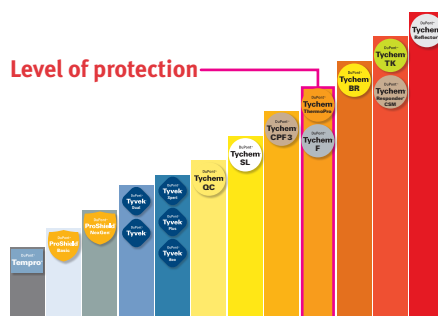



BR611T

TYCHEM® BR

- Broad protection for hazardous material handlers
- Uses include chemical handling and petrochemical manufacturing
- Multi-layer composite barrier laminated to a strong, nonwoven substrate
- Tear-, puncture- and abrasion-resistant for lasting, consistent protection
- Tychem® BR provides at least 30 minutes of protection against >280 chemical challenges
- Tychem® BR611T is certified to NFPA 1994 Class 2 and NFPA 1992
- Tychem® BR611T is designed to be used with specific NIOSH approved CBRN SCBAs
- Tychem® BR is yellow for high visibility
- 7R = MSA dual purpose #495670 Hansen fitting (left front waist)
- BN = Berry Amendment compliant 

Coverall— Certified to NFPA 1994 Class 2 and NFPA 1992

BR611TYLXX000100

Taped seams
SCBA face piece interface hood
Rear zipper closure
Triple storm flap with hook-and-loop closure
Attached jam fit removable/field replaceable neoprene outer/multi-layer laminate inner gloves
Attached socks¹
Outer boot flaps
MD-4X



Encapsulated Level A BR557TYLXX00017R

Rear entry
Taped seams
EX (extra wide) three-layer faceshield (PVC 40 mil / Teflon™ 5 mil / PVC 20 mil)
Gas-tight PVC zipper closure
Double storm flaps with hook-and-loop closure
Two exhaust valves
Flat back
Internal adjustment belt
Attached internal multi-layer laminate gloves
Attached butyl gloves
Attached socks¹
Outer boot flaps with elastic
XL-4X




Encapsulated Level B BR528TYLXX000100

Rear entry
Taped seams
Standard faceshield (20 mil PVC)
Zipper closure
Double storm flaps with hook-and-loop closure
Two exhaust vents
Expanded back
Elastic wrists
Attached socks¹
Outer boot flaps with elastic
MD-4X



Level of protection

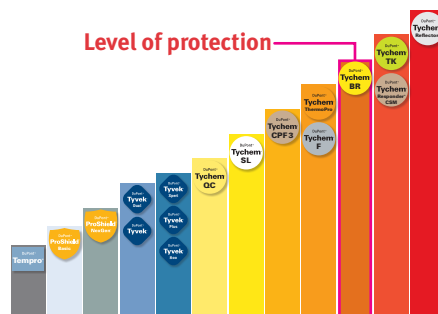

Please note that Tychem® fabrics have different permeation performance. Please check SafeSPEC™ on our website for permeation data that meets your specific needs.

Stock/Made to Order designations are based on sales volume and production efficiencies. Therefore, designations are subject to change without notice.

¹These Tychem® garments have attached socks made of the garment material. These attached socks must be worn inside protective outer footwear and are not suitable as outer footwear. These attached socks do not have adequate durability or slip resistance to be worn as the outer foot covering.


Storm flaps: All taped seam coveralls have a single storm flap with a pressure-sensitive tape closure. Option 2K garments have a hook-and-loop storm flap closure.

Seams and closures have less barrier than fabric.

Note: Not all sizes available in all styles.

WARNING: Tychem® should not be used around heat, flames, sparks or in potentially flammable or explosive environments. Only Tychem® ThermoPro, Tychem® Reflector® and Tychem® TK styles 600T/601T (with aluminized outer suit) garments are designed and tested to help reduce injury during escape from a flash fire. Users of Tychem® ThermoPro, Tychem® Reflector® and Tychem® TK styles 600T/601T (with aluminized outer suit) garments should not knowingly enter an explosive environment. Consult the Tychem® user manual, located on our website, for instructions on proper use, care and maintenance of your Tychem® garments.

A simple line drawing of a person wearing a full-body yellow protective suit. The suit has a high collar, long sleeves with elastic cuffs, and elastic hems at the ankles. The person is standing with one hand on their hip.

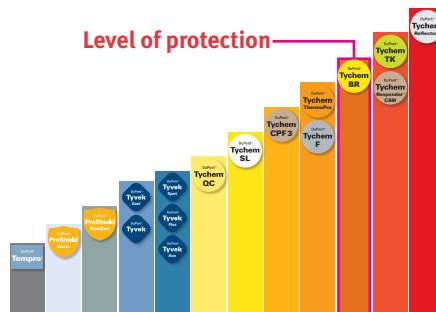A yellow protective suit with a white rectangular opening for the face, representing a full-body protective garment.

WARNING: Tychem™ should not be used around heat, flames, sparks or in potentially flammable or explosive environments. Only Tychem™ ThermoPro, Tychem™ Reflector™ and Tychem™ TK styles 600T/601T (with aluminized outer suit) garments are designed and tested to help reduce injury during escape from a flash fire. Users of Tychem™ ThermoPro, Tychem™ Reflector™ and Tychem™ TK styles 600T/601T (with aluminized outer suit) garments should not knowingly enter an explosive environment. Consult the Tychem™ user manual, located on our website, for instructions on proper use, care and maintenance of your Tychem™ garments.



TK555T

TYCHEM® TK


- Premium protection against toxic and corrosive gaseous, liquid and solid chemicals
- Leading garment chosen by HazMat responders worldwide
- Extremely durable, puncture- and tear-resistant fabric
- Wide range of garment styles, including totally encapsulated, vapor protective Level A and liquid-splash protective Level B suits
- Tychem® TK provides at least 30 minutes of protection against >320 chemical challenges
- **Tychem® TK612T/613T certified to NFPA 1994 Class 2**
- Tychem® TK is high-visibility lime yellow
- All Tychem® TK encapsulated suits are NAFTA/TAA compliant
- 5C = Showa Best® 892 outer glove
- 7R = MSA dual purpose #495670 Hansen fitting (left front waist)
- 7S = Scott® pass-thru #803620-01 Hansen fitting (right side)



HazMat Encapsulated Level A

TK554TLYXX000100 MD-4X
TK554TLYXX00015C MD-4X
TK554TLYXX00017S call for sizing

- Front entry
- Double taped seams
- EX (extra wide) three-layer faceshield (PVC 40 mil/Teflon™ 5 mil/PVC 20 mil)
- Gas-tight PVC zipper closure
- Double storm flaps with hook-and-loop closure
- Two exhaust valves
- Expanded back
- Internal adjustment belt
- Attached internal multi-layer laminate gloves
- Attached outer butyl or Viton™ gloves
- Knee wear pads
- Attached socks¹
- Outer boot flaps with elastic




Front entry

HazMat Encapsulated Level A

TK555TLYXX000100 MD-4X
TK555TLYXX00015C MD-4X
TK555TLYXX00017S call for sizing

- Rear entry
- Double taped seams
- EX (extra wide) three-layer faceshield (PVC 40 mil/Teflon™ 5 mil/PVC 20 mil)
- Gas-tight PVC zipper closure
- Double storm flaps with hook-and-loop closure
- Two exhaust valves
- Expanded back
- Internal adjustment belt
- Attached internal multi-layer laminate gloves
- Attached outer butyl or Viton™ gloves
- Knee wear pads
- Attached socks¹
- Outer boot flaps with elastic





Rear entry

Encapsulated Level A—Certified to NFPA 1994 Class 2

TK612TLYXX000100 Front entry, MD-4X
TK613TLYXX000100 Rear entry, call for sizing

- Double taped seams
- EX (extra wide) three-layer faceshield (PVC 40 mil/Teflon™ 5 mil/PVC 20 mil)
- Gas-tight zipper closure
- Double storm flap
- Two exhaust valves
- Expanded back
- Attached two-layer gloves (multi-layer laminate/neoprene)
- Attached socks¹
- Outer boot flaps with elastic

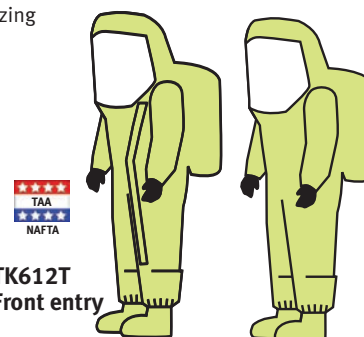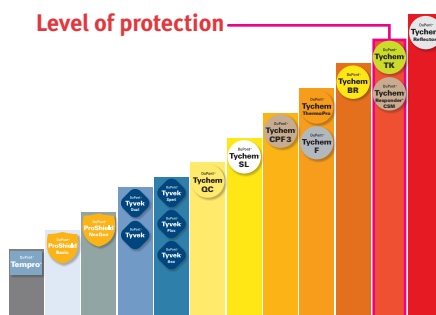TK612T
Front entryTK613T
Rear entry



HazMat Encapsulated Level A
TK552TLYXX00017R

Front entry
Double taped seams
Standard three-layer faceshield
(PVC 40 mil/Teflon™ 5 mil/
PVC 20 mil)
Gas-tight PVC zipper closure
Double storm flap with
hook-and-loop closure
Two exhaust valves
Internal adjustable belt
Flat back
Attached Guardian™ butyl outer/
multi-layer laminate internal gloves
Attached socks¹
Outer boot flaps with elastic
LG-2X



Encapsulated Level B
TK527TLYXX000100

- Front entry
- Taped seams
- Standard faceshield (40 mil PVC)
- Zipper closure
- Double storm flaps with hook-and-loop closure
- Two exhaust vents
- Expanded back
- Elastic wrists
- Attached socks¹
- Outer boot flaps with elastic


SM-4X



Coverall
TK128TLYXX000200

- Taped seams
- Attached hood (respirator fit)²
- Front zipper closure
- Double storm flaps with tape closure
- Elastic wrists
- Attached socks¹
- Outer boot flaps with elastic

SM-6X 

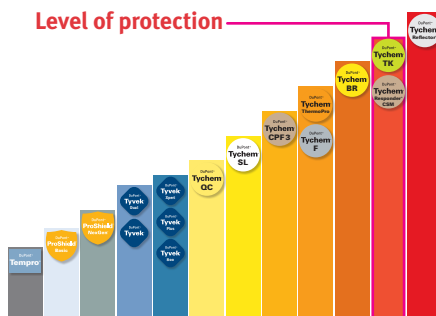

Please note that Tychem® fabrics have different permeation performance. Please check SafeSPEC™ on our website for permeation data that meets your specific needs.

Stock/Make to Order designations are based on sales volume and production efficiencies. Therefore, designations are subject to change without notice.

¹These Tychem® garments have attached socks made of the garment material. These attached socks must be worn inside protective outer footwear and are not suitable as outer footwear. These attached socks do not have adequate durability or slip resistance to be worn as the outer foot covering.

²**Respirator fit hoods** are designed with a longer zipper, extending to the chin for complete coverage of the neck area. **Standard hoods** only extend to the neck. See page 5 for photos.

Storm flaps: All taped seam coveralls have a storm flap or double storm flap, see product description for details.

Seams and closures have less barrier than fabric.

Note: Not all sizes available in all styles.

WARNING: Tychem® should not be used around heat, flames, sparks or in potentially flammable or explosive environments. Only Tychem® ThermoPro, Tychem® Reflector® and Tychem® TK styles 600T/601T (with aluminized outer suit) garments are designed and tested to help reduce injury during escape from a flash fire. Users of Tychem® ThermoPro, Tychem® Reflector® and Tychem® TK styles 600T/601T (with aluminized outer suit) garments should not knowingly enter an explosive environment. Consult the Tychem® user manual, located on our website, for instructions on proper use, care and maintenance of your Tychem® garments.

DUPONT™ TYCHEM® RESPONDER® CSM




RC550T

Encapsulated Level A

RC550TTNXX000100 MD-4X
RC550TTNXX00017C call for sizing
RC550TTNXX00017S call for sizing
RC550TTNXX00017W call for sizing

Front entry
 Double taped seams
 Two-layer faceshield (Teflon™ 5 mil / PVC 40 mil)
 Gas-tight zipper closure
 Double storm flap with hook-and-loop closure
 Two Pirelli® exhaust valves
 Expanded back
 Attached butyl gloves (mil. spec. glove)
 Attached socks¹
 Outer boot flaps



Front entry


TYCHEM® RESPONDER® CSM

- High-level protection against toxic and corrosive gaseous, liquid and solid chemicals
- Used for military weapon demilitarization
- Suited for HazMat and domestic preparedness situations
- Lightweight fabric of multiple film barriers laminated to both sides of a polypropylene fabric
- Tychem® Responder® CSM provides at least 30 minutes of protection against >320 chemical challenges
- Tychem® Responder® CSM is tan for discretionary purposes
- All Tychem® Responder® CSM suits are NAFTA/TAA compliant
- 7C = MSA connector pass-thru CAMDS (#491335) right side
- 7S = Scott® pass-thru #803620-01 Hansen fitting (right side)
- 7W = Interspiro pass-thru #33689006




Coverall

RC128TTNXX000100
 Double taped seams
 Attached hood (respirator fit)²
 Front zipper closure
 Double storm flap with hook-and-loop closure
 Attached butyl gloves (mil. spec. glove) with attached conical cuff for jam fit
 Attached socks¹
 Outer boot flaps
 SM-4X



Level of protection

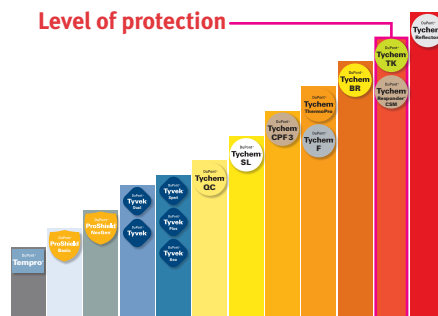

Please note that Tychem® fabrics have different permeation performance. Please check SafeSPEC™ on our website for permeation data that meets your specific needs.

Stock/Made to Order designations are based on sales volume and production efficiencies. Therefore, designations are subject to change without notice.

¹These Tychem® garments have attached socks made of the garment material. These attached socks must be worn inside protective outer footwear and are not suitable as outer footwear. These attached socks do not have adequate durability or slip resistance to be worn as the outer foot covering.

²Respirator fit hoods are designed with a longer zipper, extending to the chin for complete coverage of the neck area. Standard hoods only extend to the neck. See page 5 for photos.

Storm flaps: All taped seam coveralls have a double storm flap with a hook-and-loop closure.

Seams and closures have less barrier than fabric.

Note: Not all sizes available in all styles.

WARNING: Tychem® should not be used around heat, flames, sparks or in potentially flammable or explosive environments. Only Tychem® ThermoPro, Tychem® Reflector® and Tychem® TK styles 600T/601T (with aluminized outer suit) garments are designed and tested to help reduce injury during escape from a flash fire. Users of Tychem® ThermoPro, Tychem® Reflector® and Tychem® TK styles 600T/601T (with aluminized outer suit) garments should not knowingly enter an explosive environment. Consult the Tychem® user manual, located on our website, for instructions on proper use, care and maintenance of your Tychem® garments.

DUPONT™ TYCHEM® REFLECTOR®

DUPONT™ TYCHEM® TK 600/601



RF600T



TK600T

TYCHEM® REFLECTOR®

- “Single skin” garment offers broad chemical holdout
- Ideally suited for industrial and HazMat situations
- Chemical protection in one garment that is easy to don and doff
- Tychem® Reflector® provides at least 30 minutes of protection against >290 chemical challenges
- **Certified to NFPA 1991, with flash fire escape and liquefied gas options**
- Tychem® Reflector® is high-visibility silver
- All Tychem® Reflector® suits are NAFTA/TAA compliant
- 7M = MSA dual purpose w/Foster fitting 990060
- 7N = MSA quick fill w/Schrader fitting 990190



Please note that Tychem® fabrics have different permeation performance. Please check SafeSPEC™ on our website for permeation data that meets your specific needs.

Stock/Made to Order designations are based on sales volume and production efficiencies. Therefore, designations are subject to change without notice.

¹These Tychem® garments have attached socks made of the garment material. These attached socks must be worn inside protective outer footwear and are not suitable as outer footwear. These attached socks do not have adequate durability or slip resistance to be worn as the outer foot covering.

Tychem® TK ensembles are certified to NFPA 1991, assuming both the aluminized fiberglass overcover and chemical protective inner suit are worn, as well as any other necessary protection such as respirators, boots, etc.


Seams and closures have less barrier than fabric.

TYCHEM® TK 600/601 ENSEMBLES

- Suits provide excellent chemical holdout
- Ideally suited for industrial and HazMat situations
- Tychem® TK suit with aluminized fiberglass overcover
- **Certified to NFPA 1991, with flash fire escape and liquefied gas options**
- Outer shell is high-visibility silver
- All Tychem® TK ensembles are NAFTA/TAA compliant
- 7S = Scott® pass-thru #803620-01 Hansen fitting (right side)



Level of protection

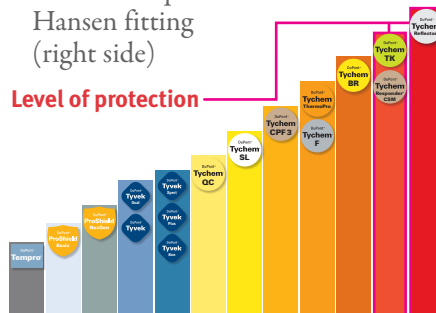


WARNINGS: 1) Suits do not provide thermal skin protection for direct contact with hot solids or liquids. They do not provide protection from continuous radiant heat sources such as furnaces or smelters. 2) Tychem® should not be used around heat, flames, sparks or in potentially flammable or explosive environments. Only Tychem® ThermoPro, Tychem® Reflector® and Tychem® TK styles 600T/601T (with aluminized outer suit) garments are designed and tested to help reduce injury during escape from a flash fire. Users of Tychem® ThermoPro, Tychem® Reflector® and Tychem® TK styles 600T/601T (with aluminized outer suit) garments should not knowingly enter an explosive environment. Consult the Tychem® user manual, located on our website, for instructions on proper use, care and maintenance of your Tychem® garments.

Fully Encapsulated Level A Tychem® Reflector®—

Certified to NFPA 1991
RF600TSVXX000100
RF600TSVXX00017M
RF600TSVXX00017N

Front entry
 “Single skin” multi-layer construction
 Triple taped seams
 Three-layer faceshield (PVC 40 mil/Teflon® 5 mil/PVC 20 mil)
 Gas-tight zipper closure
 Double storm flaps with hook-and-loop closure
 Two Pirelli® exhaust valves
 Expanded back
 Glove liners
 Multi-layer attached gloves (multi-layer laminate/neoprene/Kevlar® knit)
 Attached socks¹
 Outer boot flaps
 SM-4X




Front entry

Fully Encapsulated Level A Tychem® TK ensembles—


Certified to NFPA 1991
TK600TLYXX000100
TK601TLYXX000100
TK601TLYXX00017S

INNER SUIT
 Double taped seams
 EX (extra wide) three-layer faceshield (PVC 40 mil/Teflon® 5 mil/PVC 20 mil)
 Gas-tight zipper closure
 Double storm flap
 Four exhaust valves
 Expanded back
 Attached three-layer gloves (multi-layer laminate/neoprene/Kevlar® knit)
 Attached socks¹
 Outer boot flaps with elastic

OUTER SUIT
 Aluminized fiberglass
 Sewn Nomex® seams
 EX (extra wide) faceshield (Lexan® 20 mil)
 Storm flap with hook-and-loop closure
 Four exhaust vents
 Expanded back
 Elastic wrists
 Elastic ankles



TK600T Front entry



TK601T Rear entry

ACCESSORIES FOR TYCHEM® GARMENTS

Air relief valve

9993700000000100

Pirelli® exhaust valve



Air relief valve

9902600000000100

Exhaust valve



Exhaust diaphragm

9912200000000100 1/cs

9912200000000200 2/cs

9912200000000300 3/cs
Pirelli®



Exhaust diaphragm

9911800000000100 1/cs

9911800000000200 2/cs

9911800000000400 4/cs



Glove ring assembly

9901400000000100

Level B

Butyl o-rings

PVC glove rings



Glove ring assembly

9996100000000200

Male glove insert



Cool-Guard® vest

996000BU000000100

Personal cooling product that works to reduce body heat.

996010BU000000100

Vest only



9960300000000100

Spare set (4) Cool-Guard® refills



Universal pressure test kit

99081000000001UV

The universal pressure test kit is designed for periodic air pressure testing on all Level A fully encapsulated suits.

This compact, lightweight kit is completely self-contained, requiring no external air supply.



Adapters for test kits

9911600000000100

9993900000000100 Pirelli®

Two adapters for DuPont kit to test Tychem® Responder® suits.



99116



99939

Tychem® TK fully encapsulated training suit

TK586SLYXX000100 Front entry, MD-4X

TK586SLYXX00017W Front entry, MD-4X

TK586TLYXX000100 Front entry, MD-6X

TK587SLYXX000100 Rear entry, MD-4X

EX (extra-wide) faceshield (20 mil PVC)

Zipper closure

Storm flap over zipper

Internal waist belt

Expanded back

Attached butyl gloves

Attached socks¹

Outer boot flaps

Clearly labeled as a training suit



Additional components available, please call Customer Service.

For a complete list of pass-thru option codes, please see page 7.


For more detailed information regarding pass-thrus, please call Customer Service.

¹These Tychem® garments have attached socks made of the garment material. These attached socks must be worn inside protective outer footwear and are not suitable as outer footwear. These attached socks do not have adequate durability or slip resistance to be worn as the outer foot covering.


WARNING: Tychem® should not be used around heat, flames, sparks or in potentially flammable or explosive environments. Only Tychem® ThermoPro garments are designed and tested to help reduce injury during escape from a flash fire. Users of Tychem® ThermoPro garments should not knowingly enter an explosive environment. Consult the Tychem® user manual, located on our website, for instructions on proper use, care and maintenance of your Tychem® garments.

SIZING

PROTECTIVE GARMENT SIZING CHART

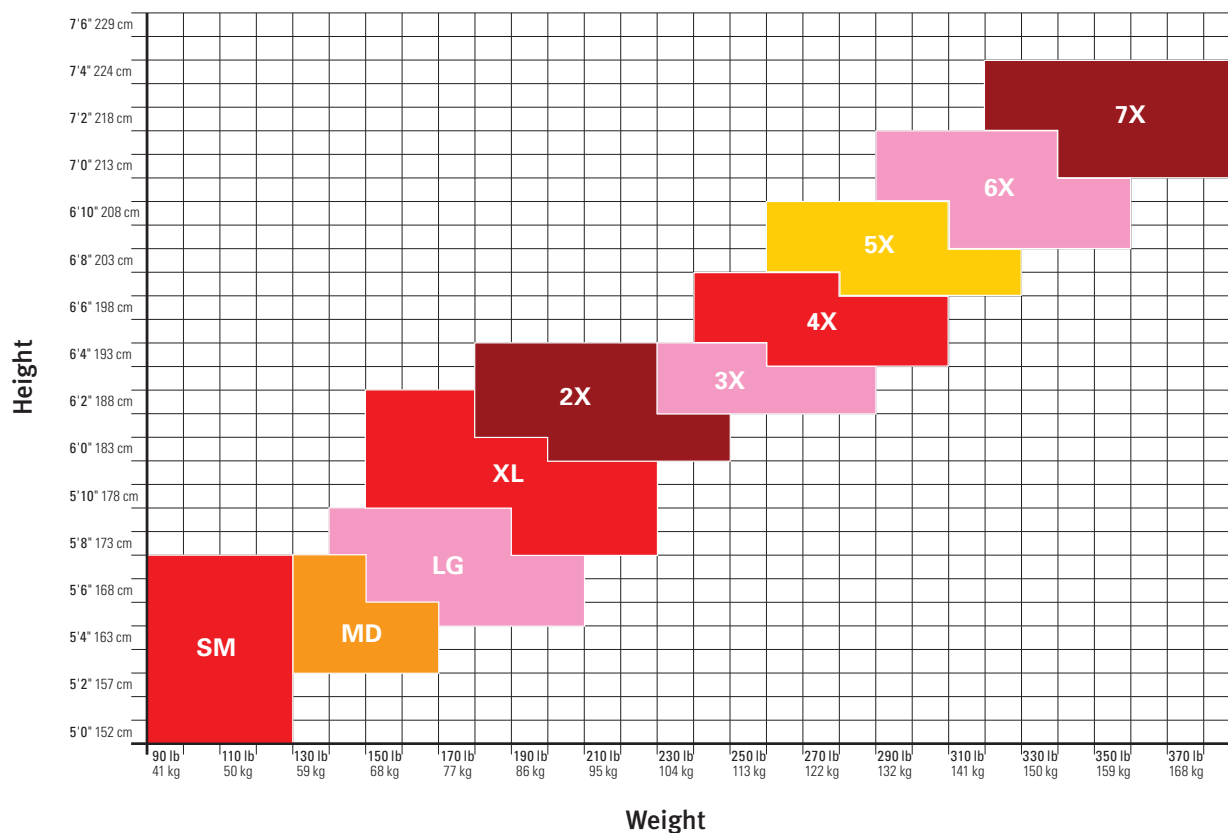

PROTECTIVE GARMENT SIZING CHART FOR FULLY ENCAPSULATED SUITS

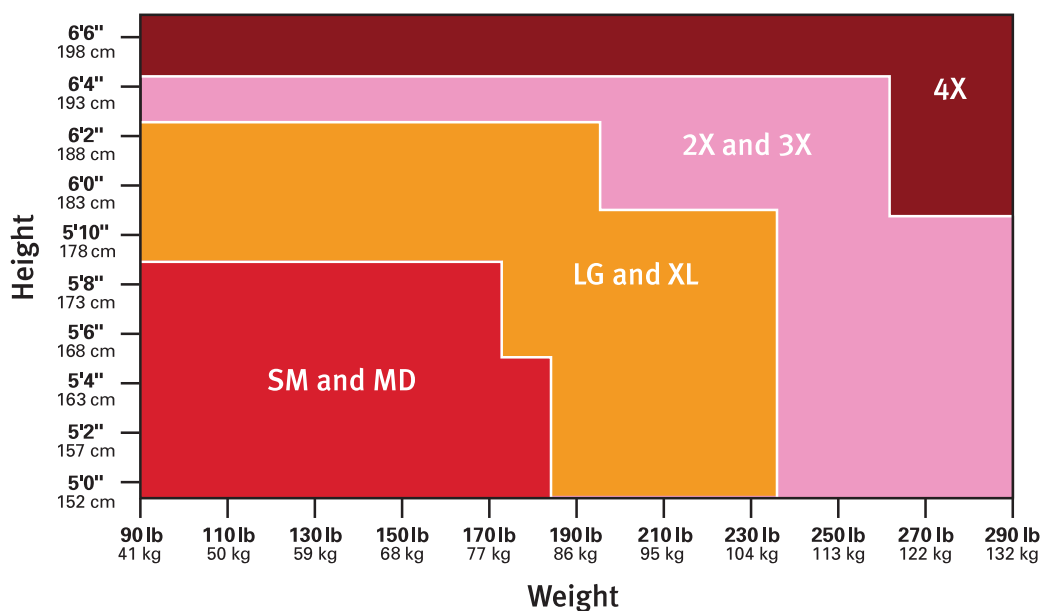

Note: This chart is based on individuals wearing SCBA, safety helmet and standard work clothing. Fit varies with individual body shape.

DUPONT CONTROLLED ENVIRONMENTS

DUPONT QUALITY SYSTEMS FOR CLEANROOM GARMENTS

DuPont single-use garments for controlled environments offer the following standards of quality:

- The DuPont Controlled Environments quality management system is ISO 9001:2008 registered
- DuPont™ Tyvek® IsoClean® sterile garments have a sterility assurance level of 10^{-6} . Irradiation doses are validated in accordance with ANSI/AAMI/ISO 11137 through bioburden and dose verification testing
- DuPont™ Tyvek® IsoClean® sterile garments are gamma irradiated in a facility that is registered by ISO 13485 quality standard and adheres to the requirements of ANSI/AAMI/ISO 11137
- A Certificate of Sterility and a Certificate of Compliance come with every shipment of sterile Tyvek® IsoClean® single-use garments
- Dose audits are conducted quarterly to maintain dose validation
- Customers are invited to audit our manufacturing and sterilization facilities
- Quality documentation is readily available and accurate when requested to help meet customer requirements
- Lot traceability is maintained through garment manufacturing, processing and sterilization

THE SUPERIORITY OF SINGLE-USE GARMENTS FROM DUPONT

DuPont sterile cleanroom garments, designed for single use, offer meaningful advantages in today's challenging cleanroom environments, including:

- **Quality**—single-use garments are not subjected to multiple cycles of wearing, laundering and sterilization, so fabric barrier and strength are consistent and predictable. Also, DuPont Controlled Environments garments help minimize cross-contamination risk because clean-processing and packaging are done in a facility that only handles new garments
- **Flexibility**—the DuPont single-use apparel program allows you to order only the quantities that you plan to use, which offers flexibility as your needs change
- **Cost Control**—single-use garments help eliminate budget uncertainties associated with garment repair, damage and loss, helping you to better predict expenditures



Among the most popular products in the DuPont Controlled Environments portfolio, DuPont™ Tyvek® IsoClean® clean-processed and sterile single-use garments offer an ideal balance of protection, durability and comfort. In addition, they feature the lowest linting and particle shedding of any garments in the DuPont portfolio.

CHOOSE FROM THESE OPTIONS:

- **CS** = Clean and Sterile: clean-processed, individually packaged and sterilized by gamma irradiation
- **OS** = Sterile: individually packaged and sterilized by gamma irradiation
- **OC** = Clean: clean-processed, individually packaged
- **00** or **0B** = Bulk packaged
- **PI** = Individually packaged in an opaque bag

DUPONT CONTROLLED ENVIRONMENTS

DUPONT CONTROLLED ENVIRONMENTS GARMENTS

DUPONT™ TYVEK® ISOCLEAN®, TYVEK® MICRO-CLEAN® 2-1-2,
DUPONT™ PROCLEAN®

	Environments/ Hazards	DuPont™ Tyvek® IsoClean®				DuPont™ Tyvek® Micro-Clean® 2-1-2		DuPont™ ProClean®*	Considerations
		Clean-Processed Sterile	Sterile	Clean-Processed Non-Sterile	Bulk Non-Sterile	Sterile	Non-Sterile**	Non-Sterile	
Environments	ISO Class 5 Aseptic Cleanrooms (Former FED-STD-209E; Class 100)	●	◐			◐			Tyvek® IsoClean® sterile garments offer excellent cleanliness, barrier and sterility assurance level.
	ISO Class 6, 7, and 8 Bioburden Control Areas (Former FED-STD-209E; Class 1000, 10,000 and 100,000)	●	●			◐			Tyvek® IsoClean® sterile garments offer excellent cleanliness, barrier and sterility assurance level.
	ISO Class 6, 7, and 8 Cleanrooms (Former FED-STD-209E; Class 1000, 10,000 and 100,000)			●	●		◐	◐	Tyvek® provides an inherent particle barrier and durability, and is low linting. Clean processing and bound seams should be considered for more critical environments.
Hazards	Non-hazardous, dry particles	●	●	●	●	●	●	●*	Tyvek® provides an inherent barrier against small particles. Bound seam garments offer a higher level of protection than serged seam garments.
	Non-hazardous, light liquid splash	◐	◐	◐	◐			●*	ProClean® provides an effective barrier against a variety of common non-hazardous liquids.
	Hazardous powders Notice: DuPont Controlled Environments garments should not be used in potentially explosive or flammable environments.	●	●	●	●				Use bound seamed garments when working with hazardous powders.
	Hazardous liquid splash Examples: organic solvents, caustics								Please refer to our Tychem® product line for liquid and vapor chemical protection.
	Electric arc, industrial fire hazard, welding	Do Not Use							Please refer to Nomex® for flame-resistant apparel. Controlled Environment garments are not suitable for firefighting activities, nor for protection from hot liquids, steam, molten metals, welding, electric arc or thermal radiation.

Comparison within the DuPont portfolio: ● Best ◐ Better (Blank) Not recommended

*Barrier properties may be compromised through use.
**Packaged individually.

DUPONT CONTROLLED ENVIRONMENTS



Coverall

IC253BWHXX00250B SM-5X
IC253BWHXX00250S SM-5X
IC253BWHXX00250C SM-5X
IC253BWHXX0025CS SM-7X

Bound seams
 Bound neck
 Dolman sleeve
 Covered elastic wrists
 Covered elastic ankles
 Front zipper closure



Coverall

IC105SWHXX002500
IC105SWHXX00250C
IC105SWHXX0025CS

Serged seams
 Standard hood
 Elastic hood opening
 Set sleeve
 Elastic wrists
 Elastic ankles
 Attached thumb loops
 Front zipper closure
 Attached boots with PVC soles
 MD-3X



Coverall

IC254BWHXX0025CS

Bound seams
 Bound neck
 Dolman sleeve
 Covered elastic wrists
 Covered elastic ankles
 Front zipper closure
 Snaps for aseptic donning
 SM-4X



Coverall

IC181SWHXX002500 SM-8X
IC181SWHXX00250C SM-4X

Serged seams
 Standard collar
 Set sleeve
 Elastic wrists
 Elastic ankles
 Zipper closure



DUPONT™ TYVEK® ISOCLEAN®

- Made from DuPont™ Tyvek® brand flashspun polyolefin protective material
- Unique, patented flash-spinning process creates a barrier to dry particles, microorganisms and non-hazardous liquids
- Comfortable, lightweight and durable
- Clean-processed garments offer lowest level of particle shedding within DuPont product portfolio
- Garments available gamma sterilized to an SAL of 10^{-6}
- Serged or bound seams with covered elastic options
- Bound seam garments offer highest particle barrier within IsoClean® product portfolio
- Traceability on all sterilized apparel
- Gripper™ soles offer a higher level of slip resistance than standard PVC soles
- Tyvek® IsoClean® is white

Boot cover

IC447SWHXX01000B MD-XL
IC447SWHXX01000C MD-XL
IC447SWHXX0100CS MD-2X

Serged seams
 Elastic opening
 Elastic ankle
 Gripper™ sole
 18" high



Boot cover

IC458BWHXX01000B
IC458BWHXX01000C
IC458BWHXX0100CS

Bound seams
 Covered elastic opening
 Ties at ankle
 Gripper™ sole
 18" high
 MD-XL



Boot cover

IC457SWHXX01000B
IC457SWHXX01000S

Serged seams
 Covered elastic opening
 Ties at ankle
 PVC sole
 18" high
 SM-XL



Shoe cover

IC461SWHXX03000B

Serged seams
 Elastic opening
 PVC sole
 Elastic toe
 5" high
 SM-XL



Frock

IC270BWHXX003000
IC270BWHXX00300C
IC270BWHXX0030CS

Bound seams
 Bound neck
 Set sleeve
 Covered elastic wrist
 Front snap closure
 (6 + 1 adjustable)
 SM-4X



Frock

IC264SWHXX00300B
IC264SWHXX00300C
IC264SWHXX0030CS


Serged seams
 Bound neck
 Raglan sleeve
 Elastic wrists
 Front zipper closure
 A-line
 SM-4X



DUPONT CONTROLLED ENVIRONMENTS


Hood

IC668BWHXX01000B
IC668BWHXX01000C
IC668BWHXX01000CS
 Bound seams
 Full face opening
 Bound hood opening
 Ties with loops for fit
 One size fits most



Sleeves

IC501BWHXX01000B
IC501BWHXX01000C
IC501BWHXX01000S
IC501BWHXX01000CS
 Bound seams
 Covered elastic wrist, bicep
 18" length
 One size fits most



Lab coat

IC224SWHXX00300B
 Serged seams
 Laydown collar
 Raglan sleeve
 Front snap closure (5)
 Pockets
 (1 left chest pencil, 2 lower front)
 SM-2X



Controlled environment mask

ML7360WHXX0250BH
ML7360WHXX02500S
 9" size
 Bound Tyvek® ties
 Pleated
 Rayon outer facing
 Metal nose piece
 One size fits most



Cuff tape

994790WHXX04000S
 Made of Tyvek® IsoClean®
 20" long x 3" wide
 One size fits most



DUPONT™ TYVEK® MICRO-CLEAN® 2-1-2

- Made from DuPont™ Tyvek® brand flashspun polyolefin protective material
- Coated on both sides with proprietary 2-1-2 blue polymeric resin
- Antistatic treated
- Garments available gamma sterilized to an SAL of 10⁻⁶
- Traceability on all sterilized apparel

CHOOSE FROM THESE OPTIONS:

- **0S** = Sterile: individually packaged and sterilized by gamma irradiation
- **PI** = Individually packaged in an opaque bag

DUPONT™ SURESTEP™


- Spunbonded polypropylene with polyethylene film coating
- Slip resistance—both wet and dry

CHOOSE FROM THESE OPTIONS:

- **00** or **0B** = Bulk packaged

Shoe cover

PE440SBUX02000B
PE440SWHXX020000
 Serged seams
 Elastic opening
 5.5" height
 MD-XL
 MD only available in white & bulk packaged



Coverall

CC252BBUX00250S
CC252BBUX0025PI
 Bound seams
 Bound neck with loop at center back
 Dolman sleeve
 Covered elastic wrists
 Covered elastic ankles
 Front zipper closure
 SM-5X



NOTE: All sizes not available in all styles. For one size fits most use 00 in the part number.

Seams and closures have less barrier than fabric.

WARNING: Cleanroom apparel should not be used around heat, flames, sparks or in potentially flammable or explosive environments. Cleanroom fabrics should have slip-resistant materials on the outer sole of boots, shoe covers or other garment surfaces in conditions where slipping could occur.

The product information contained is current as of the date of publication, but may be revised as new information is developed. Before relying on any performance data for the purchase or performance of products, you should check SafeSPEC.DuPont.com or contact DPP Customer Service at **1-800-931-3456** to determine whether there is new information that relates to your intended use or application of the product.

Be advised that certain garments contained in this catalog description are subject to U.S. Export Control laws. Purchasing these garments subjects your company to those laws for export. **For more information, contact us at 1-800-931-3456. We also offer a 24-hour emergency hotline, 1-800-441-7515.**

IT IS THE RESPONSIBILITY OF THE USER TO:

- Get trained in the proper use, handling, storage, maintenance and disposal of this garment;
- Review and understand available information about the appropriate use of this garment;
- Verify that the garment is appropriate for the user's specific application;
- Verify that the garment meets all specified government and industry standards for user's specific application;
- Carefully inspect the garment for damage before and after use, including all fabric, seams and closures.

WARNINGS:

- 1) Tyvek®, ProShield® Basic, ProShield®, ProShield® NexGen® and most Tychem® fabrics are not flame resistant and should not be used around heat, flame, sparks or potentially flammable or explosive environments.
- 2) Tychem® should not be used around heat, flames, sparks or in potentially flammable or explosive environments. Only Tychem® ThermoPro, Tychem® Reflector® and Tychem® TK styles 600T/601T (with aluminized outer suit) garments are designed and tested to help reduce injury during escape from a flash fire. Users of Tychem® ThermoPro, Tychem® Reflector® and Tychem® TK styles 600T/601T (with aluminized outer suit) garments should not knowingly enter an explosive environment. Consult the Tychem® user manual, located on our website, for instructions on proper use, care and maintenance of your Tychem® garments.
- 3) Garments should have slip-resistant or antislip materials on the outer surface of boots, shoe covers or other garment surfaces in conditions where slipping could occur.
- 4) If fabric becomes torn, scratched or punctured, or if a garment closure or seam fails, user should immediately discontinue use of garment to avoid serious injury, including potentially deadly chemical exposure(s). Seams, closures and visors may provide less protection than fabric.
- 5) Serged and/or bound seams are degraded by some hazardous liquid chemicals, such as strong acids, and should not be worn when these chemicals are present.
- 6) The outer glove on Tychem® Reflector®, Tychem® TK600T/TK601T suits may contain natural rubber latex which may cause allergic reactions in some sensitized individuals. Additionally, some internal components not expected to contact the wearer during use may contain natural rubber latex which may cause allergic reactions in some sensitized individuals. Anyone who begins to exhibit an allergic response during the use of DuPont products should immediately cease using these products. The incident should also be reported to DuPont at 1-800-441-3637 so that an investigation can be initiated.
- 7) Tyvek® Xpert, Tyvek® Plus and Tyvek® 800 J contain natural rubber latex which may cause allergic reactions in some sensitized individuals. Anyone who begins to exhibit an allergic response during the use of DuPont products should immediately cease using these products. The incident should also be reported to DuPont at 1-800-441-3637 so that an investigation can be initiated.

This information is based upon technical data that DuPont believes to be reliable. It is subject to revision as additional knowledge and experience are gained. DuPont makes no guarantee of results and assumes no obligations or liability in connection with this information. It is the user's responsibility to determine the level of toxicity and the proper personal protective equipment needed. The information set forth herein reflects laboratory performance of fabrics, not complete garments, under controlled conditions. It is intended for information use by persons having technical skill for evaluation under their specific end-use conditions, at their own discretion and risk.

Anyone intending to use this information should first verify that the garment selected is suitable for the intended use. In many cases, seams and closures have shorter breakthrough times and higher permeation rates than the fabric. If fabric becomes torn, abraded or punctured, end user should discontinue use of garment to avoid compromising the barrier protection. **SINCE CONDITIONS OF USE ARE OUTSIDE OUR CONTROL, WE MAKE NO WARRANTIES, EXPRESSED OR IMPLIED, INCLUDING WITHOUT LIMITATION, NO WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR USE AND ASSUME NO LIABILITY IN CONNECTION WITH ANY USE OF THIS INFORMATION.** This information is not intended as a license to operate under or a recommendation to infringe any patent, trademark or technical information of DuPont or others covering any material or its use.

Any warranty for products offered in this catalog can be found in the Terms and Conditions for that product.

**DuPont Personal Protection
Customer Service:
United States 1-800-931-3456
Canada 1-800-387-9326**

**5401 Jefferson Davis Highway
Richmond, VA 23234**

**PersonalProtection.DuPont.com
SafeSPEC.DuPont.com
ControlledEnvironments.DuPont.com**



Copyright © 2016 DuPont. All rights reserved. The DuPont Oval Logo, DuPont®, Cool-Guard®, Grippex®, IsoClean®, Kevlar®, Micro-Clean®, NexGen®, Nomex®, ProClean®, ProShield®, Reflector®, Responder®, SafeSPEC®, Sierra®, SureStep®, Tempro®, Tychem®, and Tyvek® are trademarks or registered trademarks of E.I. du Pont de Nemours and Company or its affiliates.

Barrier® is a registered trademark of Ansell. Best® is a registered trademark of Showa-Best Glove, Inc. Guardian™ is a trademark of Guardian Manufacturing. Lexan® is a registered trademark of Saudi Basic Industries Corporation or its affiliates. Pirelli® is a registered trademark of Pirelli & C. S.p.A. Saranex™ is a trademark of Dow Chemical Company. Scott® is a registered trademark of Scott Health & Safety. Teflon® and Viton® are trademarks of The Chemours Company FC, LLC. K-20125-1 (1/16)