


HOWARD LEIGHT™ TRUSTFIT™ POD Earplug Product Information

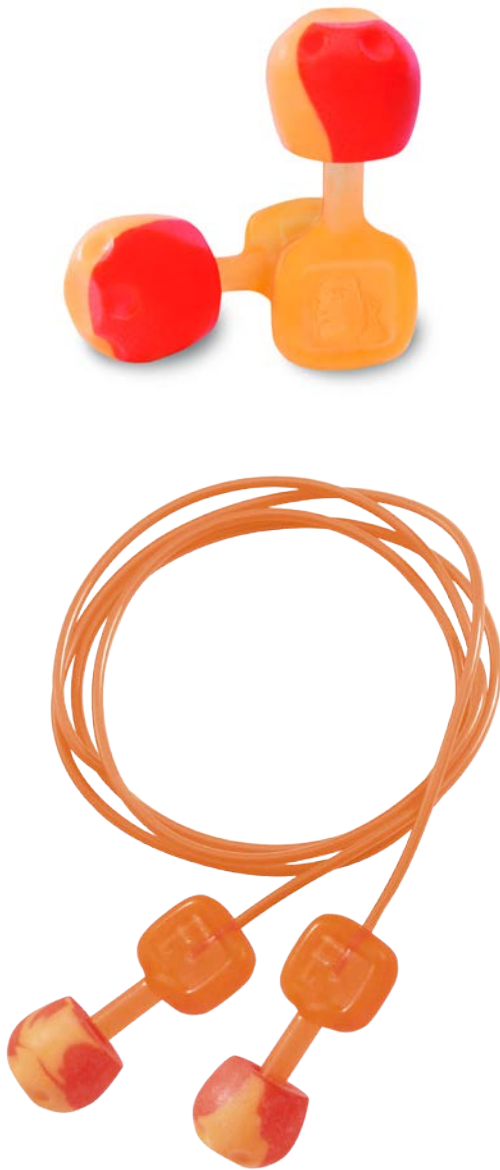

Product Range

Article	Packaging Type	Part No.
Howard Leight™ TRUSTFIT™ POD (Push In Foam)	1-pair polybag	TRUSTFITPOD-1
	1-pair polybag	TRUSTFITPOD-30
	5-pair ziptop bag	TRUSTFITPOD-1-5
	5-pair ziptop bag	TRUSTFITPOD-30-5

Description

TRUSTFITPOD-1	TrustFit Pod Push In Foam, Uncorded
TRUSTFITPOD-30	TrustFit Pod Push In Foam, Corded
TRUSTFITPOD-1-5	TrustFit Pod Push In Foam, Uncorded, 5-pair vending pack
TRUSTFITPOD-30-5	TrustFit Pod Push In Foam, Corded, 5-pair vending pack

Product Description

Part Listing	Material	Color
1. Pod	Polyurethane Foam	2-Color Orange
2. Stem Insert	TPU	Orange
3. Cord	PVC	Orange

Nominal Dimensions

Diameter (Pod)	Length (Pod+Stem)	Weight
0.51in. (+/-0.03) [13 mm (+/-0.76)]	1.20 in. (+/-0.03) [30.48 mm (+/-0.76)]	Pod=0.31g; Stem=0.62g Pod+Stem=0.93g
Storage Case/Material	Cord Length/Material	
Polybag	28 in. [711.2 mm]; PVC (translucent orange)	

Barcodes

PRODUCT #	BOX	CASE
TRUSTFITPOD-1	033552021476	1033552021473
TRUSTFITPOD-30	033552021483	1033552021480
TRUSTFITPOD-1-5	033552021544	1033552021541
TRUSTFITPOD-30-5	033552021551	1033552021558

HOWARD LEIGHT™ TRUSTFIT™ POD Earplug Product Information

Product Range		
Sales Units	Box	100 pairs
	Case	10 boxes
	Pallet	45 cases

Dimensions	Box	L-7.75"/H-8"/D-4.9"
	Case	L-16.25"/H-8.13"/D-25.5"
	Pallet	L-51"/H-91"/D-44"

Weight	Box	0.92 lb 1.3 lb 1.3 lb
	Case	10.42 lb 1.3 lb 1.3 lb
	Pallet	TBD

Material	Box	Corrugated Cardboard
	Case	Corrugated Cardboard

Customs Tariffs	Country of Origin
39 26 90 99	United States (-1) Mexico (-30)

Labeling Requirements	
USA	EPA
EU	CE, Certificate # (TBD)
AUS	StandardsMark Lic.#1579

REGULATORY REQUIREMENTS

TRUSTFIT™ POD testing according to EN 352-2:2002 at Michael & Associates, Inc.

REGION – EUROPE Certificate #TBD									
Frequency Hz	63	125	250	500	1000	2000	4000	8000	SNR Value
Mean Value, dB	N/A	37.4	33.5	37.3	37.7	38.0	37.4	43.3	36 dB
Standard Deviation, dB	N/A	4.2	3.9	4.5	4.2	3.6	3.6	3.5	
Assumed Protection, dB	N/A	33.2	29.7	32.8	33.5	34.3	33.8	39.8	
H = 35 dB	M = 33 dB	L = 32 dB							

TRUSTFIT™ POD testing according to ANSI S3.19-1974 at Michael & Associates, Inc.

REGION - USA										
Frequency Hz	125	250	500	1000	2000	3150	4000	6300	8000	NRR Value
Mean Value, dB	38.7	34.2	39.8	36.6	35.5	38.5	36.9	40.0	45.1	28 dB
Standard Deviation, dB	3.6	3.4	3.4	3.4	3.8	3.9	2.4	3.3	4.0	
Canada Class* A (L)								*CSA Z94.2-1994		

TRUSTFIT™ POD testing according is tested according to AS/NZS 1270:2002 at Michael & Associates, Inc.

REGION – AUSTRALIA Standards Mark License SMK1579									
Frequency Hz	125	250	500	1000	2000	4000	8000	SLC ₈₀ Value	
Mean Value, dB	25.6	21.6	24.8	25.0	32.5	35.4	38.6	22 dB	
Standard Deviation, dB	8.2	7.7	9.1	6.5	4.9	4.2	7.8		
Mean-Minus-Std. Dev., dB	17.4	14.0	15.7	18.5	27.5	31.1	30.8		

Class 4 Rating