


Glide[®]

find your fit[™]

GLIDE's unique multi-curved stem rotates for a custom fit inside each ear canal. With its unique curved stem design, you simply push & twist for GLIDE to angle its way to find your fit.

- Unique multi-curved stem rotates for a custom fit
- Large handle on curved stem for easy insertion & removal
- Soft triple flange plug can be washed and reused
- Cord can be attached at any desired length
- Look for the bright green color as a symbol of Moldex quality
- 100% PVC-Free, like all Moldex products & packaging – for a greener alternative
- Made in U.S.A.

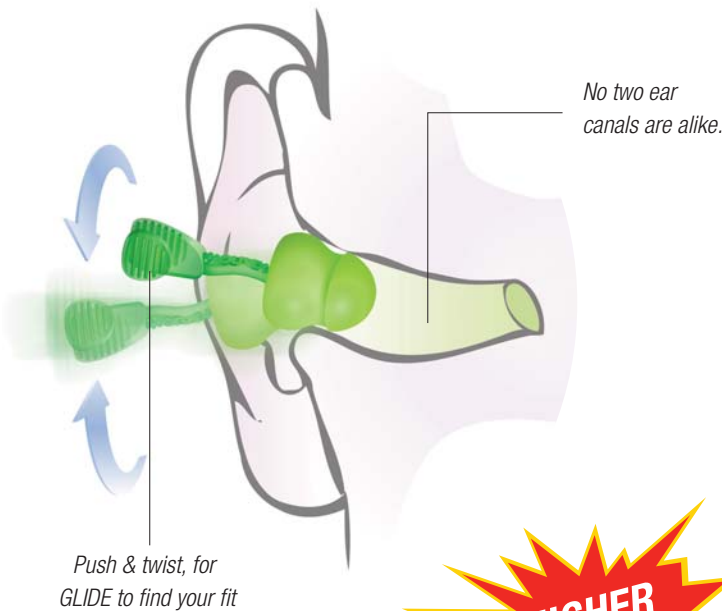

NRR
30
dB

SLC₈₀
24_{dB}
Class 4

Large soft foam pod,
for a comfortable,
snug seal & fit

Unique multi-curved
stem rotates for
a custom fit

Large handle on
curved stem for easy
insertion & removal

GLIDE Foam

MOLDEX[®]
Ideas that wear well.[®]



NRR
27
dB

SLC₈₀
26_{dB}
Class 5

Soft triple flange
plug can be washed
and reused

GLIDE Trio

6445 Glide Trio Triple Flange Reusable Earplugs



NRR
27
dB

ATTENUATION DATA / DATOS DE ATENUACIÓN / DONNÉES D'ATTÉNUATION

Tested According to ANSI Specs S3.19-1974 by Michael & Assoc., State College, PA.
Probado de acuerdo a las especificaciones ANSI S3.19-1974 Michael & Assoc., State College, PA.
Tests Conformes aux Spéc. ANSI S3.19-1974 Michael & Assoc., State College, PA.


Frequency (Hz) Frecuencia (Hz) Fréquence (Hz)	125	250	500	1000	2000	3150	4000	6300	8000		
Mean Attenuation (dB) Atenuación de Dato (dB) Atténuation Moyenne (dB)	34.4	32.5	35.9	40.7	38.7	39.4	38.8	41.0	46.0	NRR 27	CSA AL
Standard Deviation (dB) Desviación Standard (dB) Écart Standard (dB)	4.9	4.3	4.4	5.2	4.4	5.1	5.5	6.5	4.5		

ATTENUATION DATA FOR AUSTRALIA / NEW ZEALAND

Tested According to AS/NZS 1270 by Michael & Assoc., State College, PA.
Note: For full details of methods of selecting a hearing protector, see AS/NZS 1269.3
Hearing protector Class 5 tested to AS/NZS 1270. When selected, used and maintained as specified in AS/NZS 1269.3, this protector may be used in noise up to 110dB(A) assuming an 85dB(A) criterion.
A lower criterion may require a higher protector class.

SLC₉₀
26
dB
Class 5

Frequency (Hz)	125	250	500	1000	2000	4000	8000	
Mean Attenuation (dB)	30.4	25.8	29.1	33.7	33.7	35.2	41.6	SLC ₉₀ 26dB, Class 5
Standard Deviation (dB)	8.6	8.7	9.0	7.0	5.7	9.1	7.3	
Mean Minus Standard Deviation (dB)	21.9	17.1	20.1	26.6	28.0	26.2	34.4	



To attach optional cord
Form a loop at end of cord,
position around groove at
base of handle then pull
down to lock in place.

Distributed by:

MOLDEX
Ideas that wear well.

MOLDEX-METRIC, INC.
Moldex-Metric, Inc.
10111 West Jefferson Blvd., Culver City, CA 90232
TEL: +1 (800) 421-0668 or +1 (310) 837-6500
FAX: +1 (310) 837-9563
E-mail: sales@moldex.com
www.moldex.com

MOLDEX TECHNICAL SERVICE DEPARTMENT:
+1 (800) 421-0668 or
+1 (310) 837-6500 ext. 512/550

9900-036 REV D 6/14

6940 & 6945 Glide Foam Twist In Earplugs



NRR
30
dB

ATTENUATION DATA / DATOS DE ATENUACIÓN / DONNÉES D'ATTÉNUATION

Tested According to ANSI Specs S3.19-1974 by Michael & Assoc., State College, PA.
Probado de acuerdo a las especificaciones ANSI S3.19-1974 Michael & Assoc., State College, PA.
Tests Conformes aux Spéc. ANSI S3.19-1974 Michael & Assoc., State College, PA.

Frequency (Hz) Frecuencia (Hz) Fréquence (Hz)	125	250	500	1000	2000	3150	4000	6300	8000		
Mean Attenuation (dB) Atenuación de Dato (dB) Atténuation Moyenne (dB)	31.7	32.2	36.1	37.8	40.9	42.7	41.2	46.2	48.0	NRR 30	CSA AL
Standard Deviation (dB) Desviación Standard (dB) Écart Standard (dB)	5.2	3.5	4.4	3.3	3.2	2.2	3.0	4.1	4.3		

ATTENUATION DATA FOR AUSTRALIA / NEW ZEALAND

Tested According to AS/NZS 1270 by Michael & Associates.
Note: For full details of methods of selecting a hearing protector, see AS/NZS 1269.3
Hearing protector Class 4 tested to AS/NZS 1270. When selected, used and maintained as specified in AS/NZS 1269.3, this protector may be used in noise up to 105dB(A) assuming an 85dB(A) criterion.
A lower criterion may require a higher protector class.

SLC₉₀
24
dB
Class 4

Frequency (Hz)	125	250	500	1000	2000	4000	8000	
Mean Attenuation (dB)	23.3	22.6	26.7	28.1	34.0	37.6	41.5	SLC ₉₀ 24dB, Class 4
Standard Deviation (dB)	8.6	8.5	8.4	7.2	7.4	7.9	6.4	
Mean Minus Standard Deviation (dB)	14.7	14.2	18.3	20.9	26.7	29.6	35.1	

Ordering Information

SKU#	Description	NRR	SLC ₉₀	Case Pack
6445	GLIDE Trio Triple-Flange Reusable Earplugs w/ Cord	27	26, class 5	200 (50 pair per Box, 4 box per Case)
6940	GLIDE Foam Twist In Earplugs without Cord	30	24, class 4	400 (100 pair per Box, 4 box per Case)
6945	GLIDE Foam Twist In Earplugs with Cord	30	24, class 4	400 (100 pair per Box, 4 box per Case)

Glide
find your fit™



Printed on Recycled Paper

AUSTRALIA
Unit 30/14-16 Stanton Road,
Seven Hills, NSW 2147
TEL: +61 (02) 9838 7588
FAX: +61 (02) 9838 7544
E-mail: moldexaustralia@moldex.com
www.moldex.com

NEW ZEALAND
3 Spence Road
Henderson, Auckland, NZ
TEL: +64 (9) 837 8247
FAX: +64 (9) 837 8248
E-mail: moldexnz@moldex.com
www.moldex.com

